


ST-A 10/9000A-1-ST



| Colours | Article no. | EAN |
|---------|-------------|---------------|
| grey | 659387 | 4043544785862 |
| black | 659388 | 4043544785879 |
| white | 659389 | 4043544785886 |

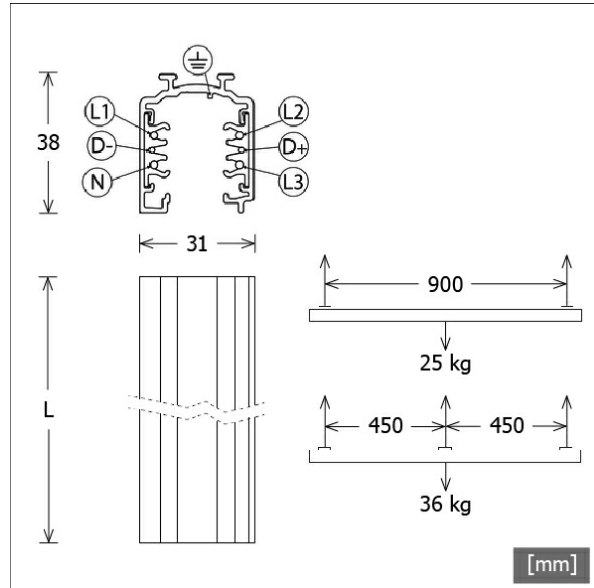

Description

- surface-mounted track with data bus (length: 1000 mm)
- also suitable for 3-phase track adapters without bus function
- realisation of lighting tasks with DALI technology
- 6-conductor track with three separately controllable current circuits
- extruded aluminium profile which also functions as earth
- length can be adjusted on site by easily shortening the track (cutting tool ST-ZCUT/S-9000/T-N required for shortening the copper conductors)
- easy ceiling mounting with pre-punched oval mounting holes
- mechanical load diagramm see additional data sheet
- max. electrical load: AC mains power supply 3.6 kVA, 3-phase network 3 x 3.6 kVA = 10.8 kVA
- rated current and voltage: 16 A / 440 V (1 A / 50 V AC FELV)
- system components to be ordered separately

Dimensions / Weights

| | |
|--------------|---------|
| Length | 1000 mm |
| Width | 31 mm |
| Height | 38 mm |
| Net weight | 0.88 kg |
| Gross weight | 0.93 kg |

ST-A 10/9000A-1-ST

Accessories



EU 36
universal hook



EU 37
cap for universal hook



LA 30 SA-NORDIC
3-phase track adapter for wire-rope suspension



ST-A CAP/9004
end cover for surface-mounted track



ST-A F/PE-L/9002
end feed-in with polarity left



ST-A F/PE-R/9001
end feed-in with polarity right



ST-A FLEX/9018
flexible connector



ST-A I/9010
electric linear connector



ST-A L/PE-IN/9011
L-connector with polarity inside



ST-A L/PE-OUT/9012
L-connector with polarity outside



ST-A P/19/S-9000-P3
pendant-rod suspension
(length: 1000 mm)



ST-A S/9000-KIT4/1500
wire-rope suspension (length: 1500 mm) + fixing
clamp

ST-A 10/9000A-1-ST

Accessories



ST-A S/9000-KIT4/3000
wire-rope suspension (length: 3000 mm) + fixing clamp



ST-A S/9000-KIT4/5000
wire-rope suspension (length: 5000 mm) + fixing clamp



ST-A S/S-9000-111
ceiling bracket



ST-A S/S-9000-116
ceiling bracket with Reutlinger



ST-A S/S-9000-131
fixing clamp



ST-A S28
wire-rope suspension 2-fold with stabilizer



ST-A T/PE-IN-L/9015
T-connector with polarity inside left



ST-A T/PE-IN-R/9016
T-connector with polarity inside right



ST-A T/PE-OUT-L/9013
T-connector with polarity outside left



ST-A T/PE-OUT-R/9014
T-connector with polarity outside right



ST-A X/9017
X-connector



ST-IE/9003
electric linear connector
(inside)



ST-IM/S-9000-322-LA
mechanical coupler
(outside)



ST-ZLA 30
3-phase track adapter



ST-ZLA 30 M10
3-phase track adapter with thread nipple M10



ST-ZLA 30 M13
3-phase track adapter with thread nipple M13



ST-ZLAB 30 M13
3-phase track bus adapter with thread nipple M13



ST-ZCOV/S-9000/GP
cover strip

ST-A 10/9000A-1-ST

Accessories



ST-ZCUT/S-9000/T-N
cutting tool



ST-ZSCHUKO/4230V
socket adapter for 3-phase track