



Series

LK-Z 060 SENSOR/OR

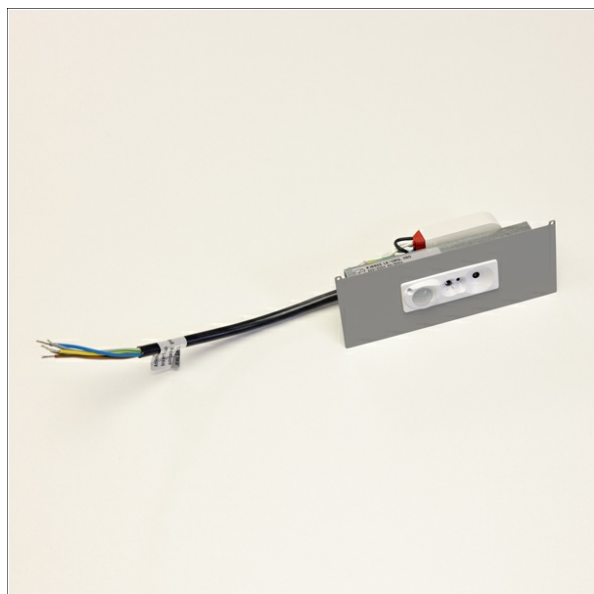

Colours	Article no.	EAN
silver	667810	4043544771483
black	667811	4043544771490
white	667812	4043544771506

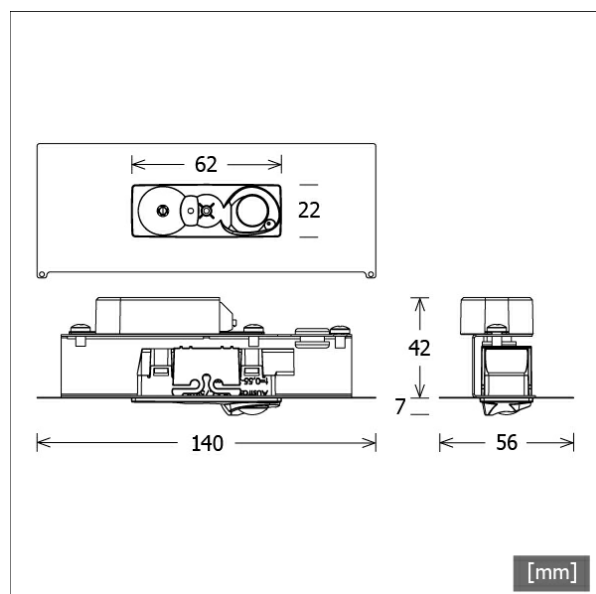

Description



- organic Response sensor for installation into Lichtkanal 060 profiles
- sensor with innovative occupancy and daylight detection and integrated DALI PS3
- power supply directly from LED ballast via 2-wire DALI interface
- sensors communicate with each other via proprietary IR messaging
- rF mesh communication between sensor and gateway
- housing cover made from aluminium
- current consumption: 0.0172 A
- output: DALI
- maximum number of DALI drivers that can be connected: 12
- dALI voltage: 16 V (min. 13.6 V - max. 18.4 V)
- ambient temperature: 0 - 50 °C
- tool-free mounting into Lichtkanal profile

Notes

Suitable for operating max. 12 light-inserts. Not suitable for profiles with AOV cover (opal acrylic glass protruding). Silver cover also available with black sensor.

Lighting data / Norms

Type of protection IP20

Dimensions / Weights

Length	140 mm
Width	56 mm
Height	49 mm
Net weight	0.12 kg
Gross weight	0.20 kg

Series

LK-Z 060 SENSOR/OR

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series