


Series

LK-Z 070 SENSOR/OR

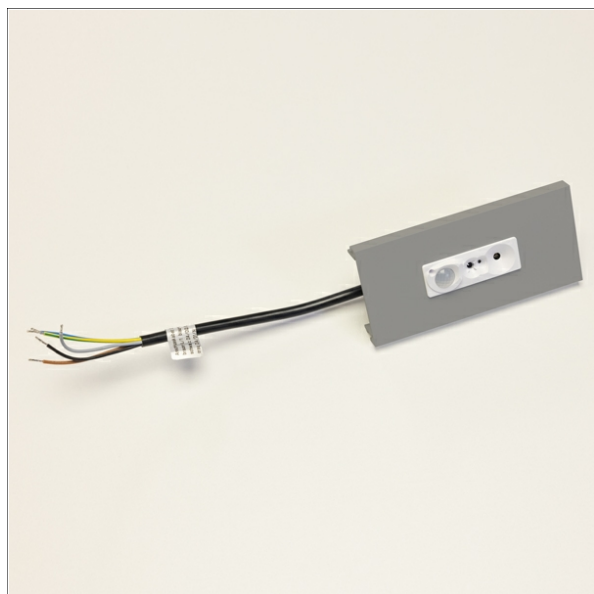

Description

- organic Response sensor for installation into Lichtkanal 070 profiles
- sensor with innovative occupancy and daylight detection and integrated DALI PS3
- power supply directly from LED ballast via 2-wire DALI interface
- sensors communicate with each other via proprietary IR messaging
- rF mesh communication between sensor and gateway
- housing cover made from aluminium
- current consumption: 0.0172 A
- output: DALI
- maximum number of DALI drivers that can be connected: 12
- dALI voltage: 16 V (min. 13.6 V - max. 18.4 V)
- ambient temperature: 0 - 50 °C
- tool-free snapping into Lichtkanal profile

Notes

Suitable for operating max. 12 light-inserts. Not suitable for profiles with AOV cover (opal acrylic glass protruding). Silver cover also available with black sensor.


Lighting data / Norms

Type of protection IP20

Dimensions / Weights

Length	140 mm
Width	65 mm
Height	50 mm
Net weight	0.20 kg
Gross weight	0.28 kg

Colours	Article no.	EAN
silver	667813	4043544771513
black	667814	4043544771520
white	667815	4043544771537

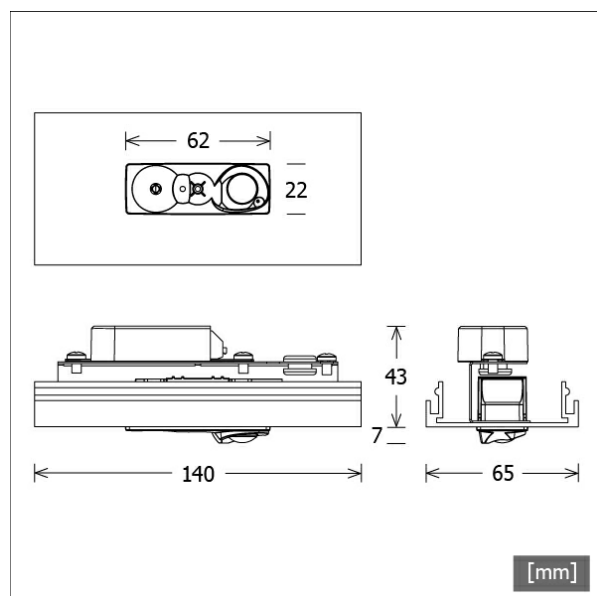

Series

LK-Z 070 SENSOR/OR

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series