


STRL-JAMIE 301.930.35/DALI

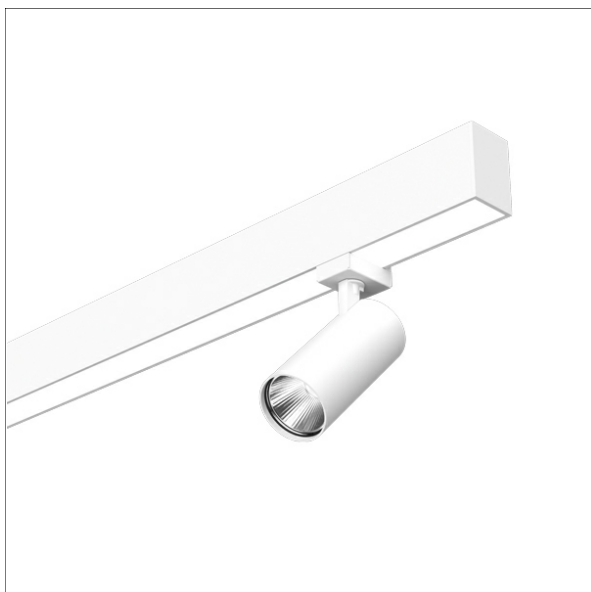

Description

- hook-in spotlight for mounting on StraitLine light trunking system
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via cylindrical aluminium housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- completely ready to plug in with connection cable (2200 mm, 5 x 0.75 mm²) and plug-in distributor
- ballast (LED converter DALI, dimmable) integrated


Standard options

4000 K

Special options



Colours	Article no.	EAN
black	659412	4043544786098
white	659413	4043544786104


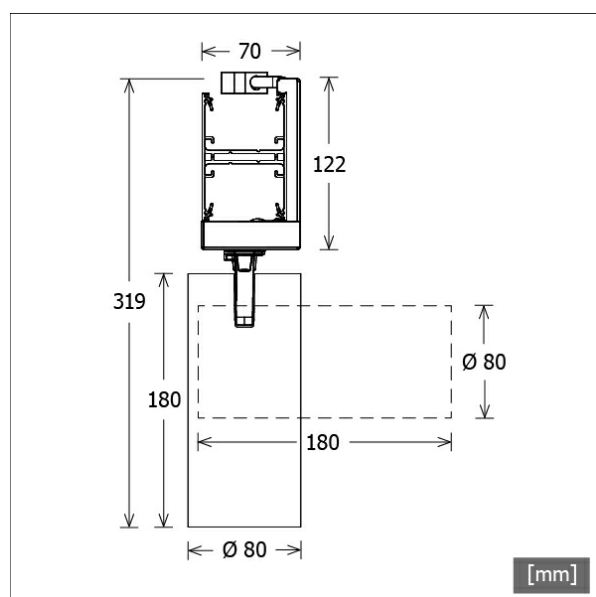


Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	16.0 W
Luminaire luminous flux	1340 lm
System efficiency	83.75 lm/W
Module efficiency	137.34 lm/W
UGR class	≤19
Beam angle	35°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	80 mm
Width	80 mm
Height	319 mm
Diameter of light head	80 mm
Net weight	1.28 kg
Gross weight	1.35 kg



STRL-JAMIE 301.930.35/DALI

StraitLine Spot | Jamie 300 (1xLED 16W 930/3000K 1340lm)



	C0	C90	C180	C270
0°	2643	2643	2643	2643
15°	1389	1389	1389	1389
30°	372	372	372	372
45°	14	14	14	14
60°	8	8	8	8
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.68	393.5
6.0	3.35	98.4
9.0	5.03	43.7
12.0	6.70	24.6
15.0	8.38	15.7

η	LED
Efficiency	84 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.6
UGR C90/C270	17.6
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre