


STRL-JAMIE 301.930.45/DALI

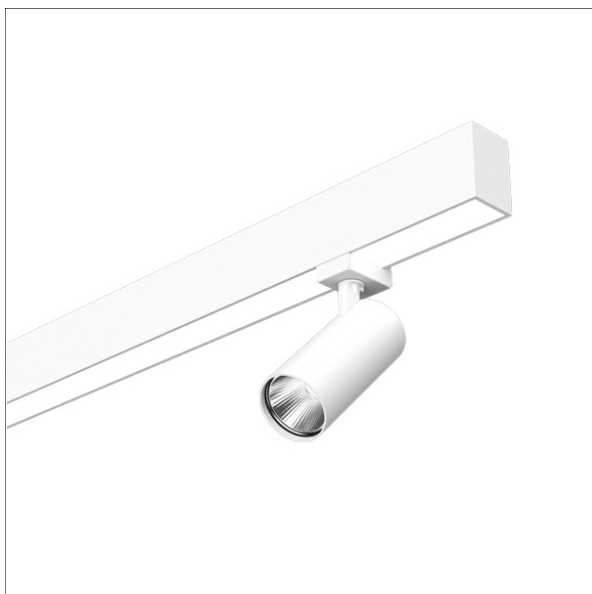

Description

- hook-in spotlight for mounting on StraitLine light trunking system
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via cylindrical aluminium housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- completely ready to plug in with connection cable (2200 mm, 5 x 0.75 mm²) and plug-in distributor
- ballast (LED converter DALI, dimmable) integrated


Standard options

4000 K

Special options



Colours	Article no.	EAN
black	659414	4043544786111
white	659415	4043544786128


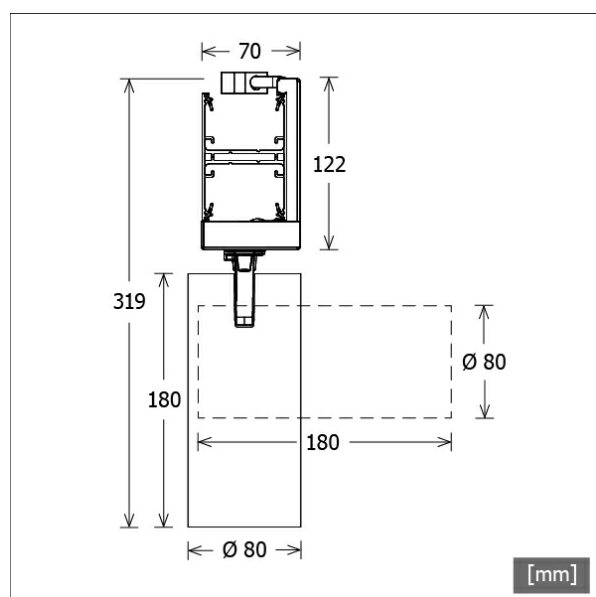


Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	16.0 W
Luminaire luminous flux	1300 lm
System efficiency	81.25 lm/W
Module efficiency	137.34 lm/W
UGR class	≤19
Beam angle	45°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	80 mm
Width	80 mm
Height	319 mm
Diameter of light head	80 mm
Net weight	1.28 kg
Gross weight	1.35 kg

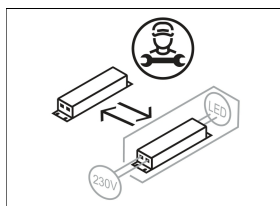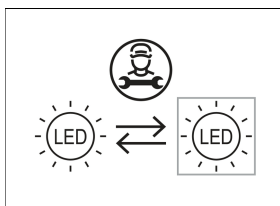

STRL-JAMIE 301.930.45/DALI

StraitLine Spot | Jamie 300 (1xLED 16W 930/3000K 1300lm)

C0/C180 cd / 1000 lm

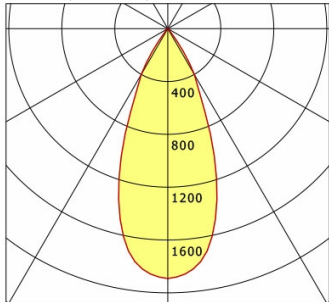

	C0	C90	C180	C270
0°	1892	1892	1892	1892
15°	1418	1418	1418	1418
30°	401	401	401	401
45°	16	16	16	16
60°	8	8	8	8
75°	6	6	6	6
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.30	273.2
6.0	4.60	68.3
9.0	6.90	30.4
12.0	9.20	17.1
15.0	11.50	10.9

η	LED
Efficiency	81 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.1
UGR C90/C270	18.1
CIE Flux Codes	97 98 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre