


STRL-JAMIE 301.940.15/DALI

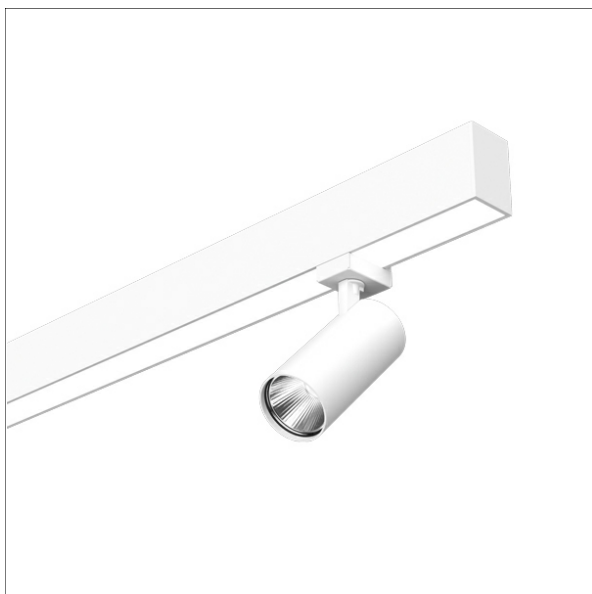

Description

- hook-in spotlight for mounting on StraitLine light trunking system
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via cylindrical aluminium housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- completely ready to plug in with connection cable (2200 mm, 5 x 0.75 mm²) and plug-in distributor
- ballast (LED converter DALI, dimmable) integrated


Standard options



Special options



Colours	Article no.	EAN
black	659416	4043544786135
white	659417	4043544786142


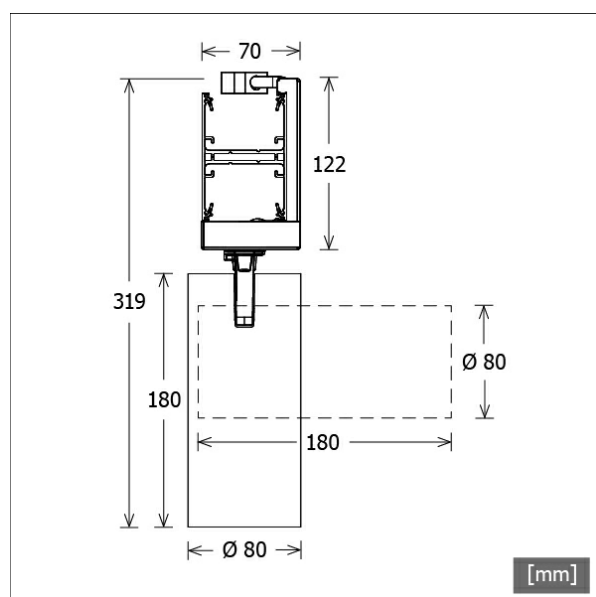


Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	16.0 W
Luminaire luminous flux	1450 lm
System efficiency	90.62 lm/W
Module efficiency	145.23 lm/W
UGR class	≤19
Beam angle	15°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	80 mm
Width	80 mm
Height	319 mm
Diameter of light head	80 mm
Net weight	1.28 kg
Gross weight	1.35 kg

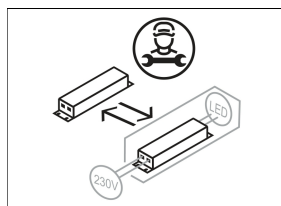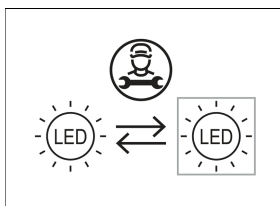

STRL-JAMIE 301.940.15/DALI

StraitLine Spot | Jamie 300 (1xLED 16W 940/4000K 1450lm)

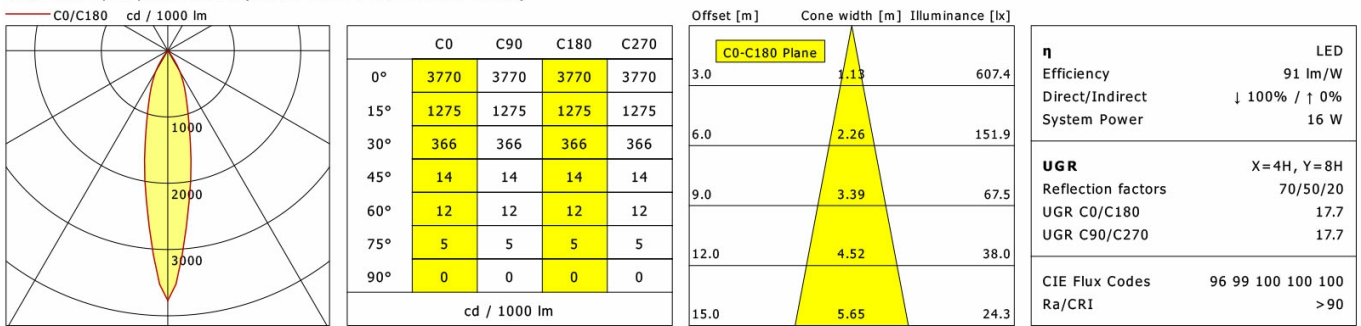

Offset [m] Cone width [m] Illuminance [lx]

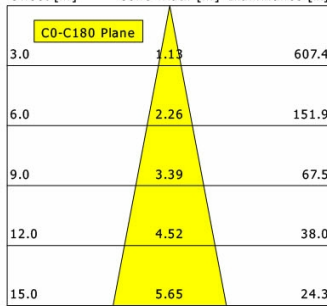


Diagram showing beam spread and illuminance values (lx) for the StraitLine Spot Jamie 300. The diagram includes a central beam and surrounding areas labeled 1.13, 2.26, 3.39, 4.52, and 5.65.

η

Efficiency LED 91 lm/W

Direct/Indirect ↓ 100% / ↑ 0%

System Power 16 W

UGR X=4H, Y=8H

Reflection factors 70/50/20

UGR C0/C180 17.7

UGR C90/C270 17.7

CIE Flux Codes 96 99 100 100 100

Ra/CRI >90

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre