


STRL-JAMIE 302.930.25/DALI

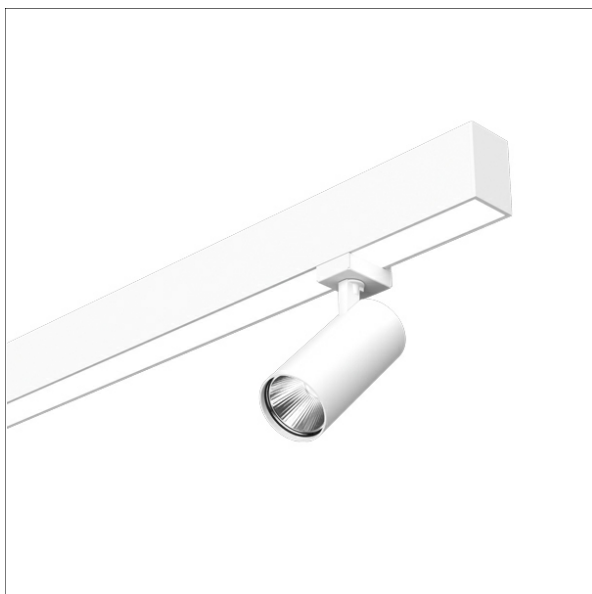

Description

- hook-in spotlight for mounting on StraitLine light trunking system
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via cylindrical aluminium housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- completely ready to plug in with connection cable (2200 mm, 5 x 0.75 mm²) and plug-in distributor
- ballast (LED converter DALI, dimmable) integrated



Standard options

4000 K

Special options



Colours	Article no.	EAN
black	659426	4043544786234
white	659427	4043544786241

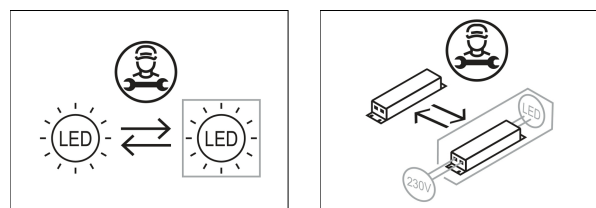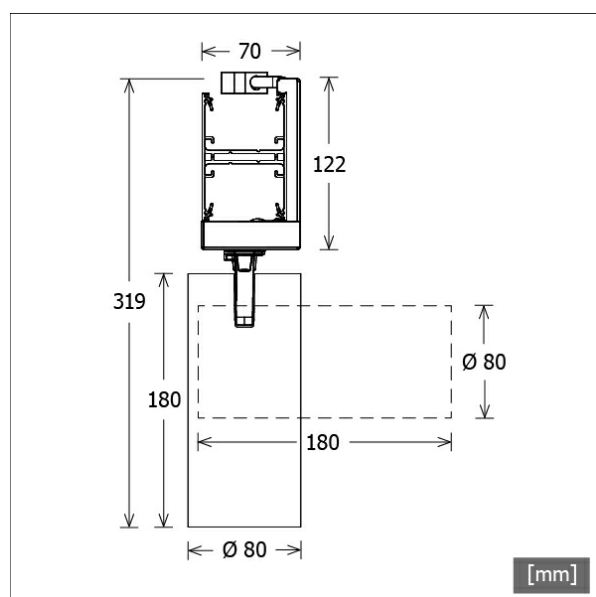

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851023
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	24.6 W
Luminaire luminous flux	2360 lm
System efficiency	95.93 lm/W
Module efficiency	132.78 lm/W
UGR class	≤22
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	80 mm
Width	80 mm
Height	319 mm
Diameter of light head	80 mm
Net weight	1.28 kg
Gross weight	1.35 kg

STRL-JAMIE 302.930.25/DALI

StraitLine Spot | Jamie 300 (1xLED 25W 930/3000K 2360lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	3602	3602	3602	3602
15°	1156	1156	1156	1156
30°	352	352	352	352
45°	18	18	18	18
60°	9	9	9	9
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.21	944.6
6.0	2.41	236.2
9.0	3.62	105.0
12.0	4.82	59.0
15.0	6.03	37.8

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.6
UGR C90/C270	19.6
CIE Flux Codes	96 98 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre