


STRL-JAMIE 302.930.35/DALI

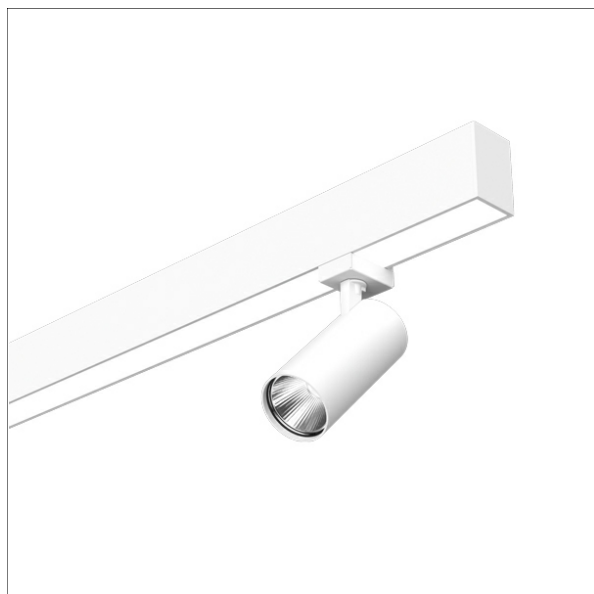

Description

- hook-in spotlight for mounting on StraitLine light trunking system
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via cylindrical aluminium housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- completely ready to plug in with connection cable (2200 mm, 5 x 0.75 mm²) and plug-in distributor
- ballast (LED converter DALI, dimmable) integrated


Standard options

4000 K

Special options



Colours	Article no.	EAN
black	659428	4043544786258
white	659429	4043544786265


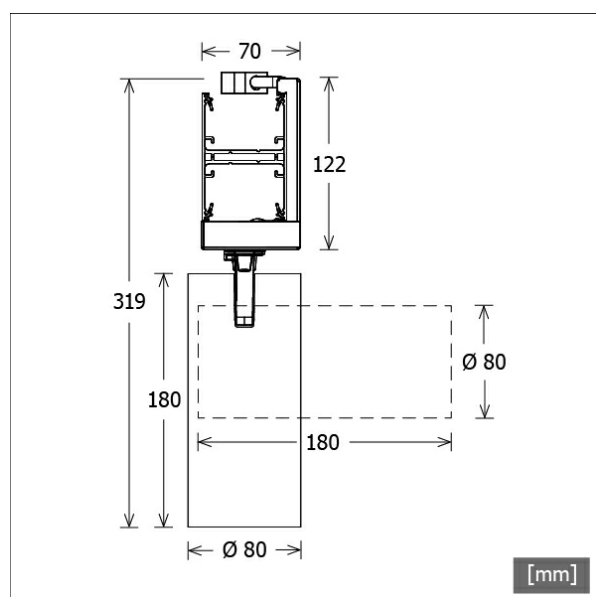


Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851023
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	24.6 W
Luminaire luminous flux	2310 lm
System efficiency	93.90 lm/W
Module efficiency	132.78 lm/W
UGR class	≤22
Beam angle	35°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	80 mm
Width	80 mm
Height	319 mm
Diameter of light head	80 mm
Net weight	1.28 kg
Gross weight	1.35 kg



STRL-JAMIE 302.930.35/DALI

StraitLine Spot | Jamie 300 (1xLED 25W 930/3000K 2310lm)



	C0	C90	C180	C270
0°	2648	2648	2648	2648
15°	1405	1405	1405	1405
30°	363	363	363	363
45°	15	15	15	15
60°	9	9	9	9
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.69	679.6
6.0	3.38	169.9
9.0	5.06	75.5
12.0	6.75	42.5
15.0	8.44	27.2

η	LED
Efficiency	93 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	19.7
CIE Flux Codes	96 98 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre