


STRL-JAMIE 302.930.45/DALI

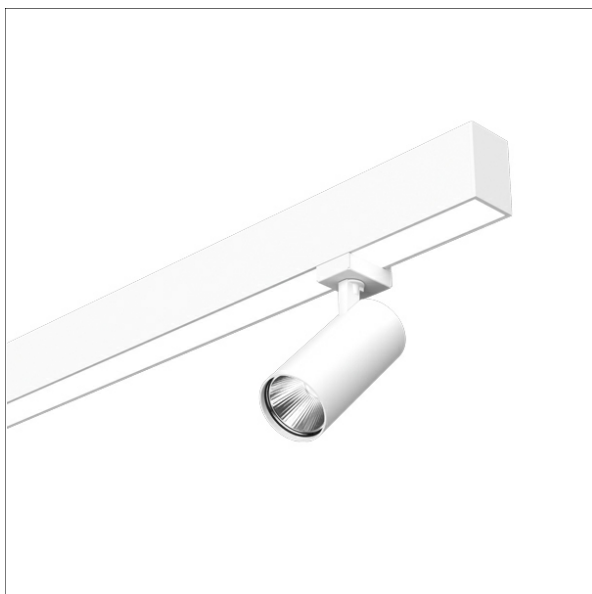

Description

- hook-in spotlight for mounting on StraitLine light trunking system
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via cylindrical aluminium housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- completely ready to plug in with connection cable (2200 mm, 5 x 0.75 mm²) and plug-in distributor
- ballast (LED converter DALI, dimmable) integrated



Standard options

4000 K

Special options



Colours	Article no.	EAN
black	659430	4043544786272
white	659431	4043544786289

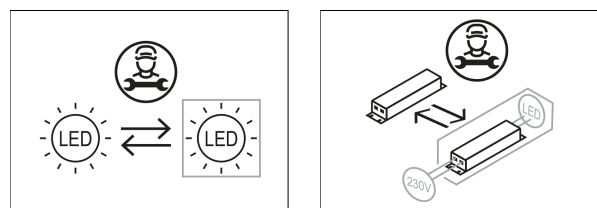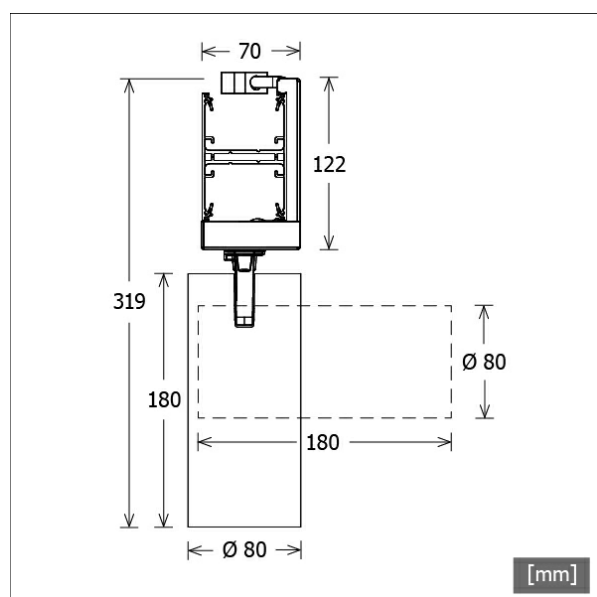

Lighting data / Norms


Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	851023
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	24.6 W
Luminaire luminous flux	2170 lm
System efficiency	88.21 lm/W
Module efficiency	132.78 lm/W
UGR class	≤22
Beam angle	45°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	80 mm
Width	80 mm
Height	319 mm
Diameter of light head	80 mm
Net weight	1.28 kg
Gross weight	1.35 kg

STRL-JAMIE 302.930.45/DALI

StraitLine Spot | Jamie 300 (1xLED 25W 930/3000K 2170lm)

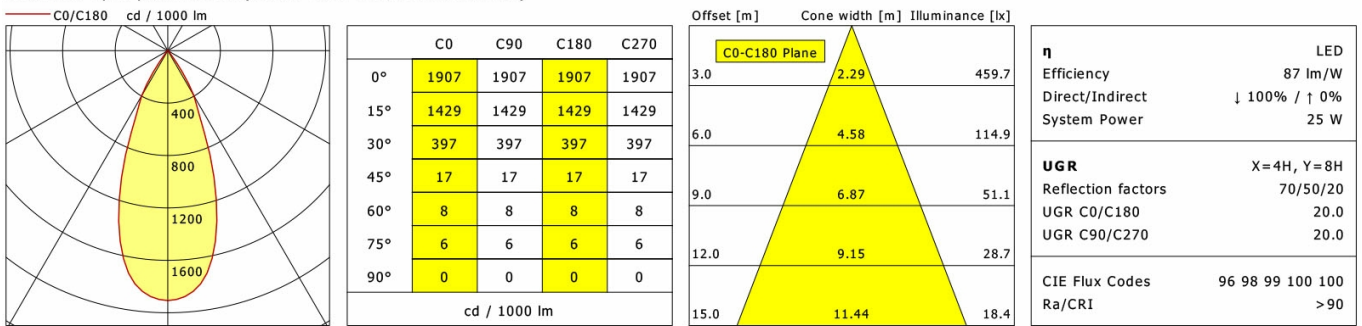

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre