


STRL-JAMIE 302.940.15/DALI

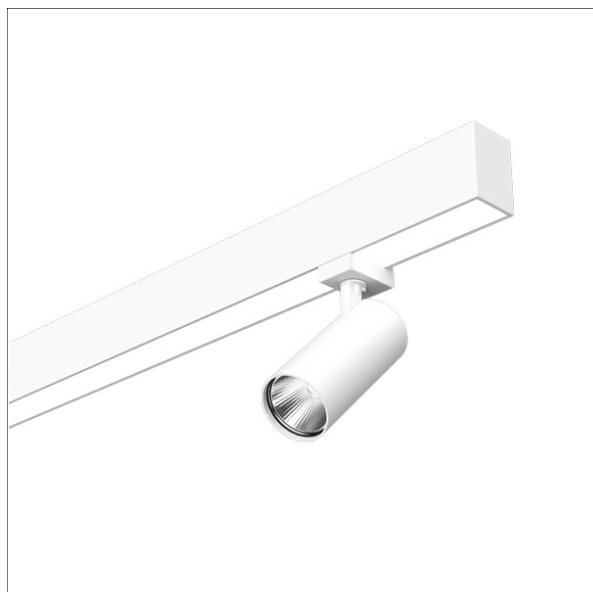

Description

- hook-in spotlight for mounting on StraitLine light trunking system
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via cylindrical aluminium housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- completely ready to plug in with connection cable (2200 mm, 5 x 0.75 mm²) and plug-in distributor
- ballast (LED converter DALI, dimmable) integrated


Standard options



Special options



Colours	Article no.	EAN
black	659432	4043544786296
white	659433	4043544786302


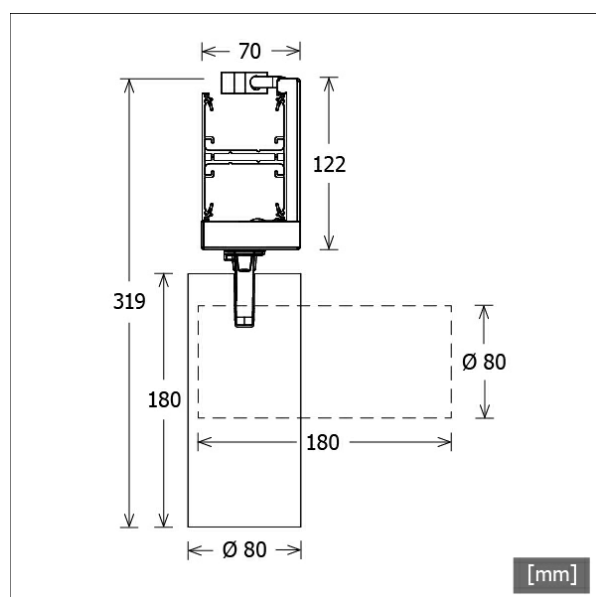


Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	851045
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	24.6 W
Luminaire luminous flux	2460 lm
System efficiency	100.00 lm/W
Module efficiency	139.42 lm/W
UGR class	≤22
Beam angle	15°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	80 mm
Width	80 mm
Height	319 mm
Diameter of light head	80 mm
Net weight	1.28 kg
Gross weight	1.35 kg

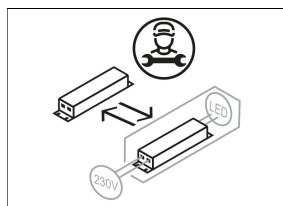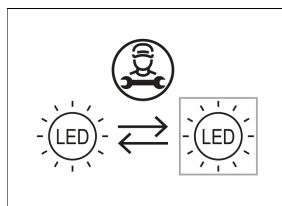

STRL-JAMIE 302.940.15/DALI

StraitLine Spot | Jamie 300 (1xLED 25W 940/4000K 2460lm)

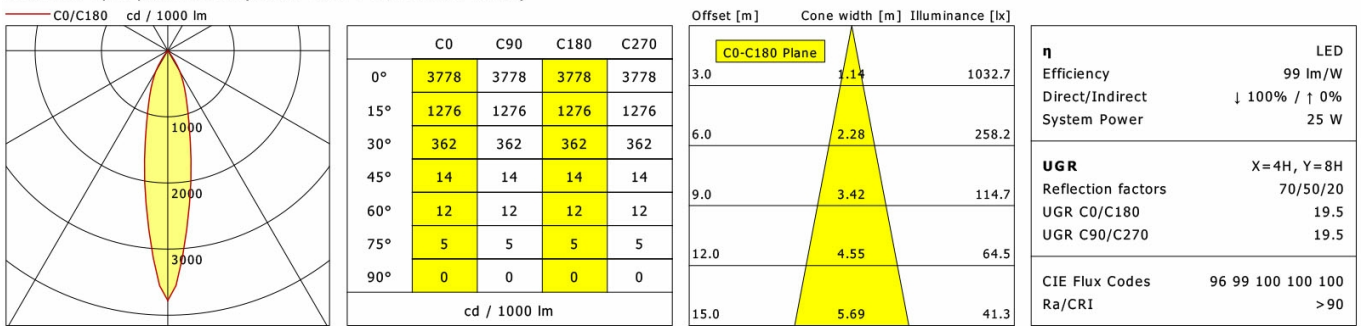

Offset [m] Cone width [m] Illuminance [lx]

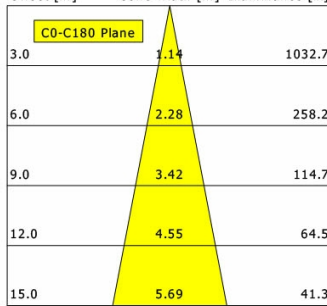


Diagram showing beam spread and illuminance values (lx) for the StraitLine Spot Jamie 300. The diagram includes concentric circles representing beam diameters of 1.14, 2.28, 3.42, 4.55, and 5.69 m. The beam is labeled C0-C180 Plane.

η

Efficiency LED 99 lm/W

Direct/Indirect ↓ 100% / ↑ 0%

System Power 25 W

UGR X=4H, Y=8H

Reflection factors 70/50/20

UGR C0/C180 19.5

UGR C90/C270 19.5

CIE Flux Codes 96 99 100 100 100

Ra/CRI >90

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre