


ORYO-P 202.B.25



| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 659453 | 4043544786494 |
| black | 659454 | 4043544786500 |
| white | 659455 | 4043544786517 |

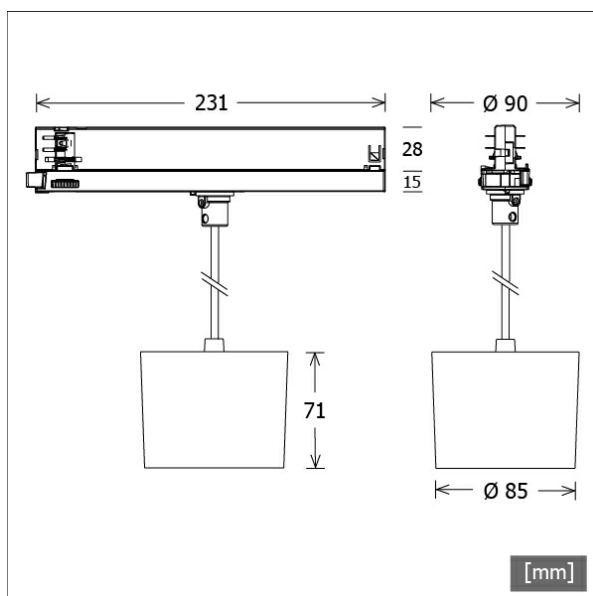

Description

- pendant luminaire with slightly conical light-head for special lighting of bakery products
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- clear safety glass
- 3-phase track adapter with integrated ballast

Notes

Not compatible with ONETrack Trimless tracks.

Standard options



Special options



Lighting data / Norms

| | |
|-------------------------|---|
| Lamps | LED Spot Bakery / CRI 82 |
| EPREL light sources | 832579 |
| Lifetime | L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h |
| System power | 25.7 W |
| Luminaire luminous flux | 2670 lm |
| System efficiency | 103.89 lm/W |
| Module efficiency | 109.90 lm/W |
| UGR class | ≤19 |
| Beam range | Medium Flood |
| Beam angle | 25° |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | II |
| Type of protection | IP20 |

Dimensions / Weights


| | |
|------------------------|---------|
| Outer diameter | 85 mm |
| Height | 71 mm |
| Diameter of light head | 85 mm |
| Net weight | 0.74 kg |
| Gross weight | 0.84 kg |

ORYO-P 202.B.25

ORYO-P 202.B.25

Oryo 200 | Pendant (1xLED 26W BAKERY 2670lm)

C0/C180 cd / 1000 lm



| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 3376 | 3376 | 3376 | 3376 |
| 15° | 1307 | 1307 | 1307 | 1307 |
| 30° | 341 | 341 | 341 | 341 |
| 45° | 11 | 11 | 11 | 11 |
| 60° | 7 | 7 | 7 | 7 |
| 75° | 1 | 1 | 1 | 1 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0 | 1.32 | 1001.6 |
| 6.0 | 2.64 | 250.4 |
| 9.0 | 3.97 | 111.3 |
| 12.0 | 5.29 | 62.6 |
| 15.0 | 6.61 | 40.1 |

| | |
|--------------------|--------------------|
| η | LED |
| Efficiency | 103 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 26 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 18.1 |
| UGR C90/C270 | 18.1 |
| CIE Flux Codes | 98 100 100 100 100 |
| Ra/CRI | --- |

LTS

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ZB-AGS 002
anti-glare shield



ZB-DAR 002
decorative anti-glare ring



ZBW 89
honeycomb louvre