

ORYO-T 202.B.45



Description

- flexible track-mounted spotlight with slightly conical light-head for special lighting of bakery products
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- black internal thermoplastic front ring
- clear safety glass
- 3-phase track adapter with integrated ballast

Notes

Not compatible with ONETrack Trimless tracks.

Standard options



Special options






Lighting data / Norms

Lamps	LED Spot Bakery / CRI 82
EPREL light sources	832579
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.7 W
Luminaire luminous flux	2680 lm
System efficiency	104.28 lm/W
Module efficiency	109.90 lm/W
UGR class	≤22
Beam range	Flood
Beam angle	45°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Length	231 mm
Width	85 mm
Height	108 mm
Diameter of light head	85 mm
Net weight	0.68 kg
Gross weight	0.78 kg


Colours	Article no.	EAN
silver	659450	4043544786463
black	659451	4043544786470
white	659452	4043544786487

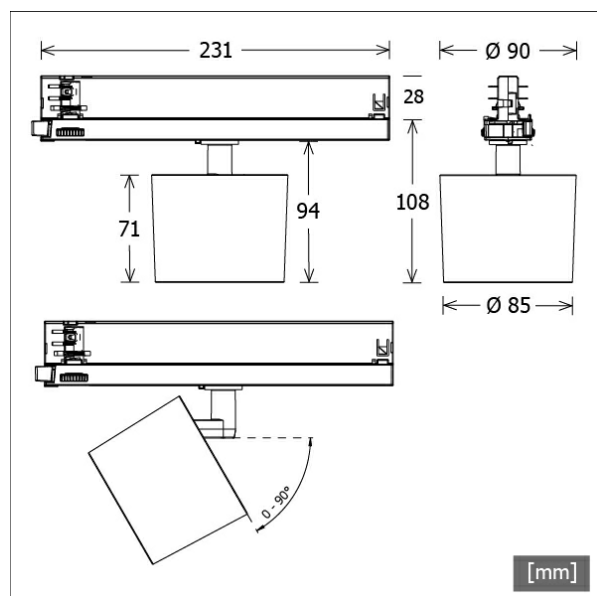

ORYO-T 202.B.45

ORYO-T 202.B.45

Oryo 200 | Track-Mounted (1xLED 26W BAKERY 2680lm)

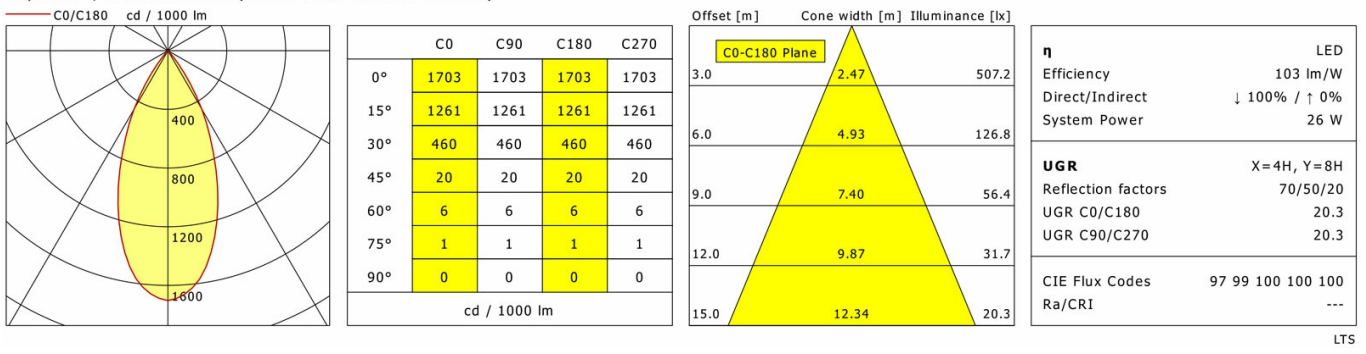

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.47	507.2
6.0	4.93	126.8
9.0	7.40	56.4
12.0	9.87	31.7
15.0	12.34	20.3

η

Efficiency LED 103 lm/W

Direct/Indirect ↓ 100% / ↑ 0%

System Power 26 W

UGR X=4H, Y=8H

Reflection factors 70/50/20


UGR C0/C180 20.3

UGR C90/C270 20.3


CIE Flux Codes 97 99 100 100 100

Ra/CRI ---


Accessories




ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)




ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)




ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)




ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)




ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)




ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)




ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)




ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ZB-AGS 002
anti-glare shield



ZB-DAR 002
decorative anti-glare ring



ZBW 89
honeycomb louvre