

ORYO-P 201.927.L06/DALI-ST



Description

- pendant luminaire with slightly conical light-head
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- black internal thermoplastic front ring
- black internal thermoplastic front ring
- black connecting cable (length: 1000 mm, other cable lengths on request)
- high-quality Fresnel lens made of PMMA (Made in Germany) suitable for accentuation
- 3-phase track adapter (ONETrack) with integrated DALI ballast


Notes

Compatible with power tracks ONETrack and Global Trac PULSE. Not compatible with ONETrack Trimless tracks.

Standard options



Colours	Article no.	EAN
silver	659097	4043544782991
black	659098	4043544783004
white	659099	4043544783011


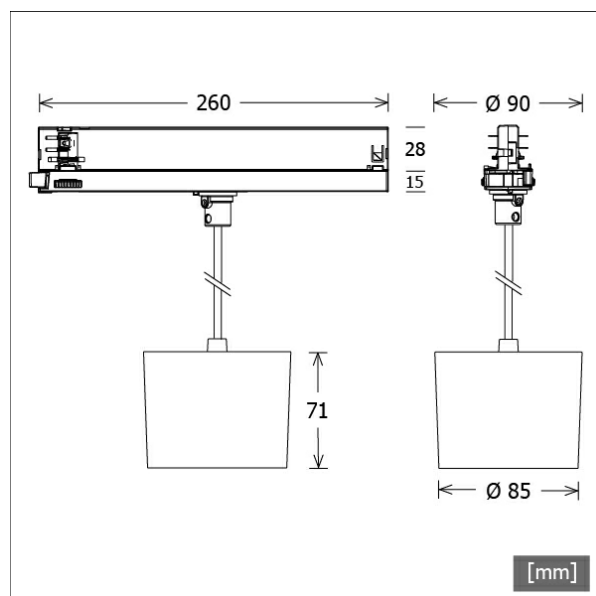


Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	881632
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	20.2 W
Luminaire luminous flux	510 lm
System efficiency	25.24 lm/W
Module efficiency	126.00 lm/W
UGR class	≤22
Beam range	Narrow Spot
Beam angle	6°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Outer diameter	85 mm
Height	71 mm
Diameter of light head	85 mm
Net weight	0.74 kg
Gross weight	0.84 kg

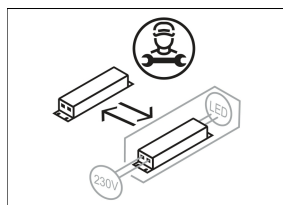


ORYO-P 201.927.L06/DALI-ST

ORYO-P 201.927.L06/DALI-ST

Oryo 200 | Pendant (1xLED 20W 927/2700K 510lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	14031	14031	14031	14031
15°	557	557	557	557
30°	111	111	111	111
45°	87	87	87	87
60°	59	59	59	59
75°	19	19	19	19
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	0.53	795.1
6.0	1.06	198.8
9.0	1.59	88.3
12.0	2.12	49.7
15.0	2.65	31.8

η	LED
Efficiency	26 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	20 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.0
UGR C90/C270	22.0
CIE Flux Codes	81 93 99 100 100
Ra/CRI	>90

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)




ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ZB-AGS 002
 anti-glare shield



ZB-DAR 002
 decorative anti-glare ring



ZB-OR DONGLE
 Organic Response IR dongle kit



ZB-OR GATEWAY
 Organic Response IoT Gateway Cascade Series

Decorative Luminaires · ORYO 200 Track-Mounted Pendant



ORYO-P 201.927.L06/DALI-ST

Accessories



ZB-OR-T SENSOR
Organic Response sensor for track mounting