

ORYO-T 201.927.L06/DALI-EU




Description

- flexible track-mounted spotlight with slightly conical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- black internal thermoplastic front ring
- high-quality Fresnel lens made of PMMA (Made in Germany) suitable for accentuation
- 3-phase track adapter DALI (Eutrac)

Standard options



Colours	Article no.	EAN
silver	659067	4043544782694
black	659068	4043544782700
white	659069	4043544782717

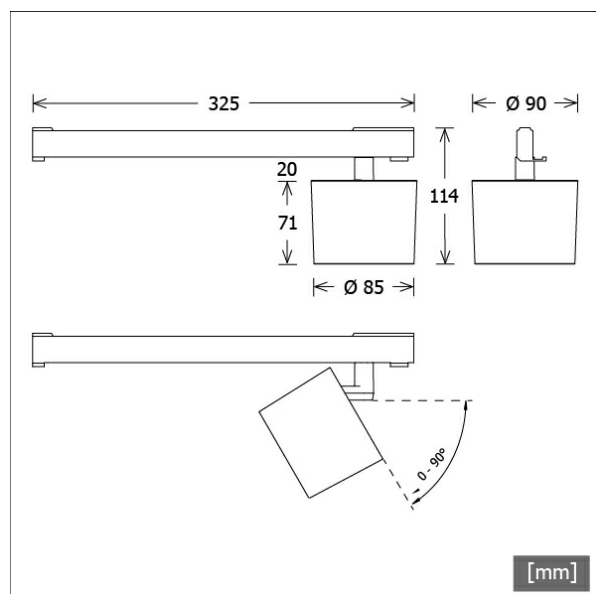

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	20.2 W
Luminaire luminous flux	510 lm
System efficiency	25.24 lm/W
Module efficiency	135.00 lm/W
UGR class	≤22
Beam range	Narrow Spot
Beam angle	6°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Length	325 mm
Width	85 mm
Height	91 mm
Diameter of light head	85 mm
Net weight	0.64 kg
Gross weight	0.78 kg




ORYO-T 201.927.L06/DALI-EU

ORYO-T 201.927.L06/DALI-EU

Oryo 200 | Track-Mounted (1xLED 20W 927/2700K 510lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	14031	14031	14031	14031
15°	557	557	557	557
30°	111	111	111	111
45°	87	87	87	87
60°	59	59	59	59
75°	19	19	19	19
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	0.53	795.1
6.0	1.06	198.8
9.0	1.59	88.3
12.0	2.12	49.7
15.0	2.65	31.8

η	LED
Efficiency	26 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	20 W

UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.0
UGR C90/C270	22.0

CIE Flux Codes	81 93 99 100 100
Ra/CRI	>90

LTS

Accessories



ZB-AGS 002
anti-glare shield



ZB-DAR 002
decorative anti-glare ring