

## ORYO-T 201.940.L06/DALI-EU




## Description

- flexible track-mounted spotlight with slightly conical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- anti-glare shield and decorative anti-glare ring available as accessories
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- black internal thermoplastic front ring
- high-quality Fresnel lens made of PMMA (Made in Germany) suitable for accentuation
- 3-phase track adapter DALI (Eutrac)

## Standard options



Colours	Article no.	EAN
silver	659085	4043544782878
black	659086	4043544782885
white	659087	4043544782892


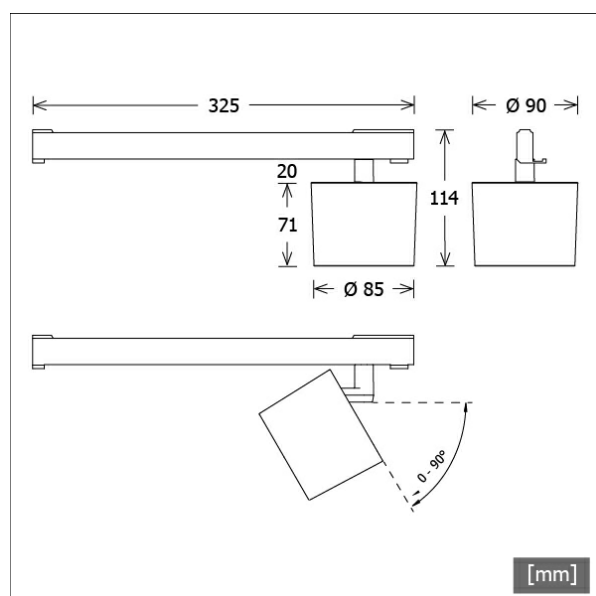


## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	20.0 W
Luminaire luminous flux	570 lm
System efficiency	28.21 lm/W
Module efficiency	151.00 lm/W
UGR class	≤22
Beam angle	6°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

## Dimensions / Weights

Length	325 mm
Width	85 mm
Height	91 mm
Diameter of light head	85 mm
Net weight	0.64 kg
Gross weight	0.78 kg

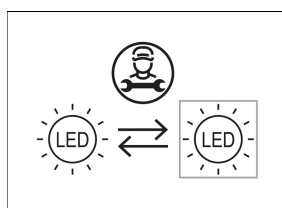


# ORYO-T 201.940.L06/DALI-EU

## ORYO-T 201.940.L06/DALI-EU

Oryo 200 | Track-Mounted (1xLED 20W 940/4000K 570lm)

C0/C180    cd / 1000 lm



	C0	C90	C180	C270
0°	14031	14031	14031	14031
15°	557	557	557	557
30°	111	111	111	111
45°	87	87	87	87
60°	59	59	59	59
75°	19	19	19	19
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

C0-C180 Plane		
3.0	0.53	888.6
6.0	1.06	222.2
9.0	1.59	98.7
12.0	2.12	55.5
15.0	2.65	35.5

<b>η</b>	LED
Efficiency	29 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	20 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.3
UGR C90/C270	22.3
CIE Flux Codes	81 93 99 100 100
Ra/CRI	>90

LTS

## Accessories



**ZB-AGS 002**  
anti-glare shield



**ZB-DAR 002**  
decorative anti-glare ring