

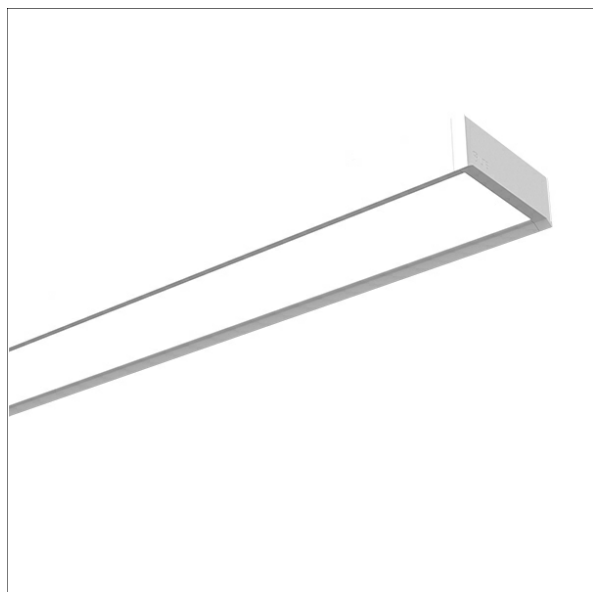



# MILA-A 104.1500.830/DALI



| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| silver  | 660028      | 4043544792228 |
| black   | 660029      | 4043544792235 |
| white   | 660030      | 4043544792242 |

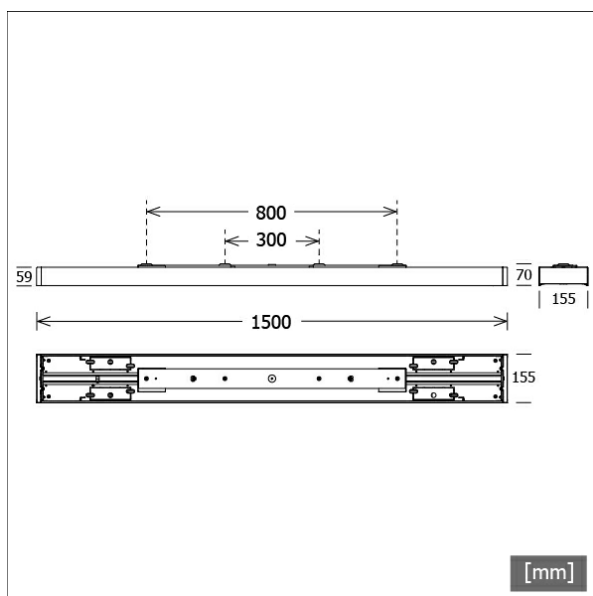

## Description

- dimmable ceiling luminaire in rectangular design for direct lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from extruded aluminium
- end covers made from die-cast aluminium and sheet steel
- diffuser for optimal glare control made from microprismatic acrylic glass with integrated matt foil
- direct screw mounting on ceiling
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

## Standard options



## Special options



## Lighting data / Norms

|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| Lamps                   | LED linear / CRI 80 / 3000 K                              |
| EPREL light sources     | 833887 833894 833899                                      |
| Lifetime                | L90 B50 50.000 h<br>L80 B50 100.000 h<br>L80 B20 50.000 h |
| System power            | 26.1 W                                                    |
| Luminaire luminous flux | 3560 lm                                                   |
| System efficiency       | 136.39 lm/W                                               |
| Module efficiency       | 177.88 lm/W                                               |
| UGR class               | ≤19                                                       |
| Supply voltage          | 220 - 240 V / 50 - 60 Hz                                  |
| Protection class        | I                                                         |
| Type of protection      | IP20                                                      |


## Dimensions / Weights

|              |         |
|--------------|---------|
| Length       | 1500 mm |
| Width        | 155 mm  |
| Height       | 70 mm   |
| Net weight   | 7.10 kg |
| Gross weight | 7.60 kg |

# MILA-A 104.1500.830/DALI

## MILA-A 104.1500.830/DALI

Mila | Ceiling (1xLED 26W 830/3000K 3560lm)



|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 450 | 450 | 450  | 450  |
| 15°          | 429 | 428 | 429  | 428  |
| 30°          | 365 | 365 | 365  | 365  |
| 45°          | 262 | 264 | 262  | 264  |
| 60°          | 94  | 98  | 94   | 98   |
| 75°          | 36  | 37  | 36   | 37   |
| 90°          | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

| Offset [m] | Cone width [m] |                | Illuminance [lx] |
|------------|----------------|----------------|------------------|
|            | C0-C180 Plane  | C90-C270 Plane |                  |
| 3.0        | 6.73           | 6.83           | 178.1            |
| 6.0        | 13.47          | 13.66          | 44.5             |
| 9.0        | 20.20          | 20.49          | 19.8             |
| 12.0       | 26.93          | 27.32          | 11.1             |
| 15.0       | 33.67          | 34.15          | 7.1              |

|                    |                  |
|--------------------|------------------|
| <b>η</b>           | LED              |
| Efficiency         | 137 lm/W         |
| Direct/Indirect    | ↓ 100% / ↑ 0%    |
| System Power       | 26 W             |
| <b>UGR</b>         | X=4H, Y=8H       |
| Reflection factors | 70/50/20         |
| UGR C0/C180        | 18.8             |
| UGR C90/C270       | 19.2             |
| CIE Flux Codes     | 58 88 97 100 100 |
| Ra/CRI             | >80              |

LTS