

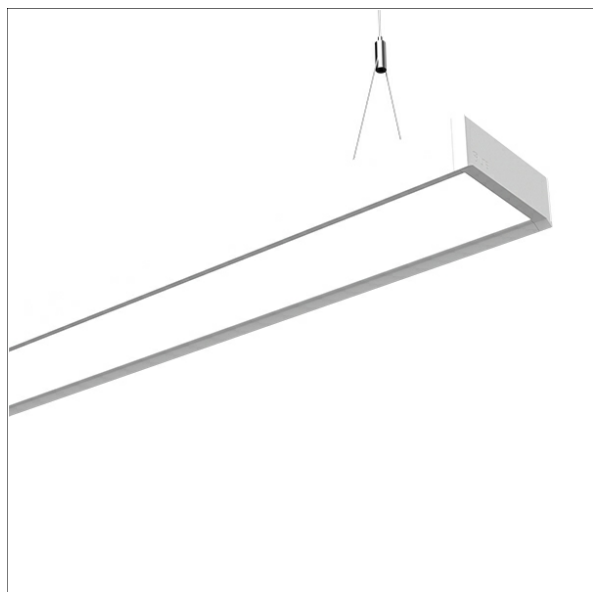



MILA-P 104.1500.830/DALI



Colours	Article no.	EAN
silver	660040	4043544792341
black	660041	4043544792358
white	660042	4043544792365

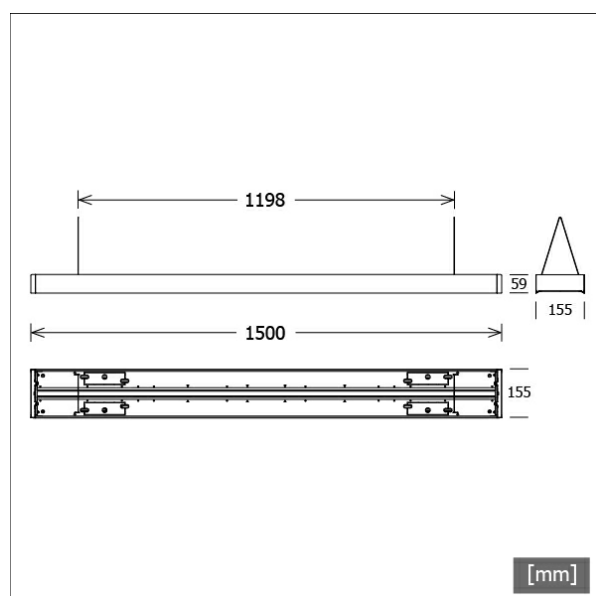

Description

- dimmable pendant luminaire in rectangular design for direct lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from extruded aluminium
- end covers made from die-cast aluminium and sheet steel
- diffuser for optimal glare control made from microprismatic acrylic glass with integrated matt foil
- Y-wire-rope suspension 2-fold with height-adjustment (length: 1500 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling box with feed-in made from ABS in the same colour as the luminaire
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833887 833894 833899
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	26.1 W
Luminaire luminous flux	3560 lm
System efficiency	136.39 lm/W
Module efficiency	177.88 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	1500 mm
Width	155 mm
Height	59 mm
Net weight	7.43 kg
Gross weight	7.93 kg

MILA-P 104.1500.830/DALI

MILA-P 104.1500.830/DALI

Mila | Pendant (1xLED 26W 830/3000K 3560lm)



	C0	C90	C180	C270
0°	450	450	450	450
15°	429	428	429	428
30°	365	365	365	365
45°	262	264	262	264
60°	94	98	94	98
75°	36	37	36	37
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	6.73	6.83	178.1
6.0	13.47	13.66	44.5
9.0	20.20	20.49	19.8
12.0	26.93	27.32	11.1
15.0	33.67	34.15	7.1

η	LED
Efficiency	137 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.8
UGR C90/C270	19.2
CIE Flux Codes	58 88 97 100 100
Ra/CRI	>80

LTS

Accessories



MILA-Z090.102
row installation kit for MILA-P