



MILA-P 308.1500.830/DALI

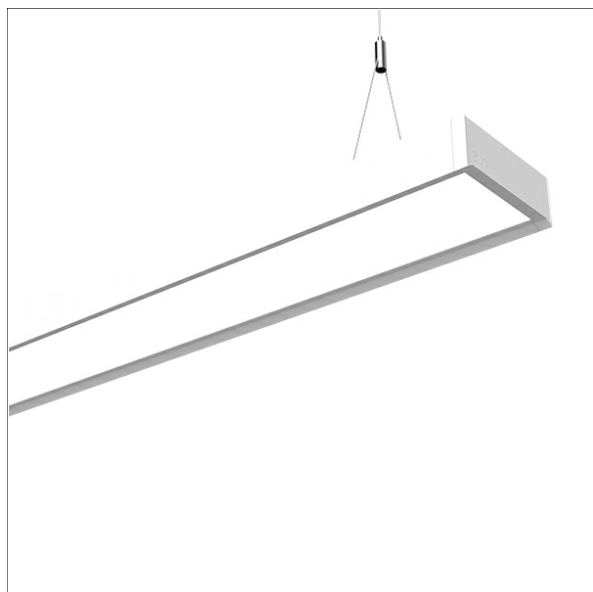

Colours	Article no.	EAN
silver	660303	4043544792464
black	660678	4043544792471
white	660905	4043544792488

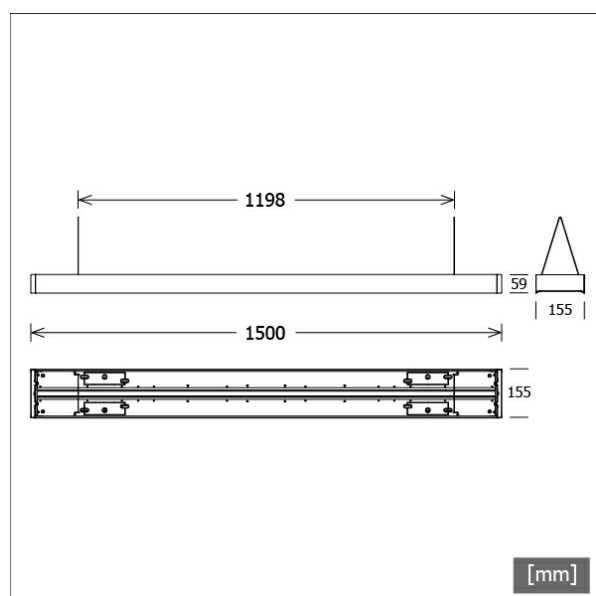

Description

- dimmable pendant luminaire in rectangular design for direct-indirect lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from extruded aluminium
- end covers made from die-cast aluminium and sheet steel
- diffuser for optimally glare-reduced direct light component made from microprismatic acrylic glass with integrated matt foil, diffuser for indirect light component made from transparent PMMA recycle
- Y-wire-rope suspension 2-fold with height-adjustment (length: 1500 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling box with feed-in made from ABS in the same colour as the luminaire
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833887 833894 833899
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	55.2 W
Luminaire luminous flux	8380 lm
System efficiency	151.81 lm/W
Module efficiency	177.88 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	1500 mm
Width	155 mm
Height	59 mm
Net weight	7.43 kg
Gross weight	7.93 kg

MILA-P 308.1500.830/DALI

MILA-P 308.1500.830/DALI

Mila | Pendant (1xLED 55W 830/3000K 8380lm)



	C0	C90	C180	C270
0°	217	217	217	217
30°	177	176	177	176
60°	47	48	47	48
90°	0	1	0	1
120°	82	85	82	85
150°	161	155	161	155
180°	182	182	182	182
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	152 lm/W
Direct/Indirect	↓ 49% / ↑ 51%
System Power	55 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.1
UGR C90/C270	16.5
CIE Flux Codes	58 88 97 49 100
Ra/CRI	>80

LTS

Accessories



MILA-Z090.102
row installation kit for MILA-P