

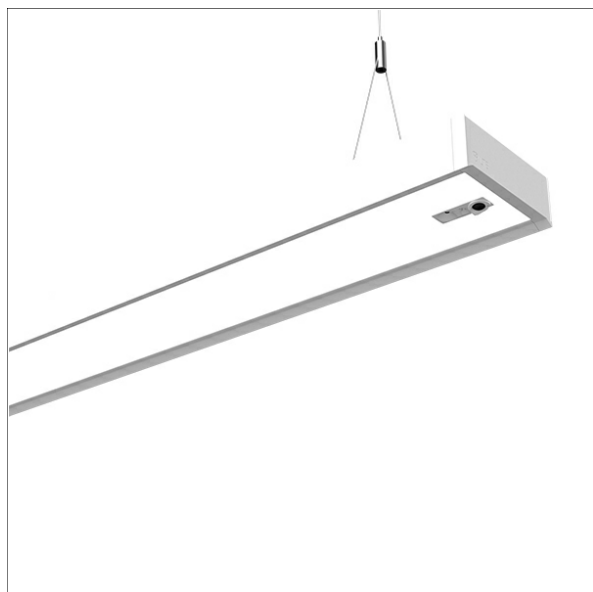



MILA-P 308.1500.840/OR



Colours	Article no.	EAN
silver	661181	4043544792556
black	661182	4043544792563
white	661187	4043544792570

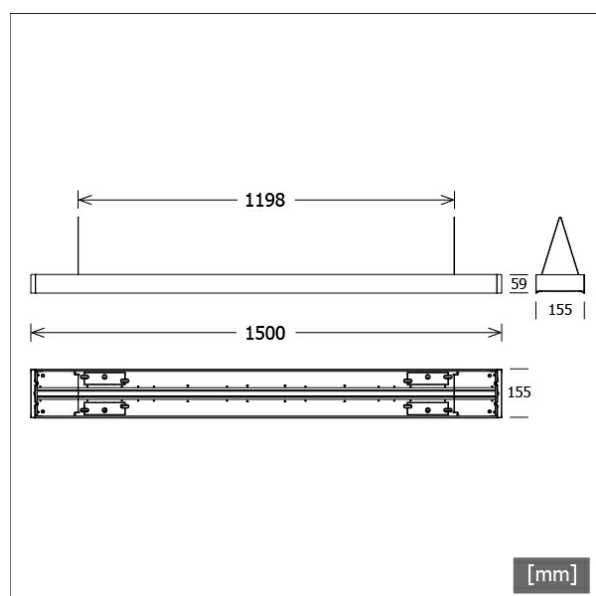

Description

- dimmable pendant luminaire in rectangular design for direct-indirect lighting of workplaces
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from extruded aluminium
- end covers made from die-cast aluminium and sheet steel
- diffuser for optimally glare-reduced direct light component made from microprismatic acrylic glass with integrated matt foil, diffuser for indirect light component made from transparent PMMA recyclate
- Organic Response technology: PIR sensor with presence and daylight control (all luminaires act as master/slave with IR communication)
- Y-wire-rope suspension 2-fold with height-adjustment (length: 1500 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling box with feed-in made from ABS in the same colour as the luminaire
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833888 833895 833900
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	55.8 W
System power	8570 lm
Luminaire luminous flux	153.58 lm/W
System efficiency	186.59 lm/W
Module efficiency	≤19
UGR class	220 - 240 V / 50 - 60 Hz
Supply voltage	I
Protection class	IP20
Type of protection	


Dimensions / Weights

Length	1500 mm
Width	155 mm
Height	59 mm
Net weight	7.48 kg
Gross weight	7.98 kg

MILA-P 308.1500.840/OR

MILA-P 308.1500.840/OR

Mila | Pendant (1xLED 56W 840/4000K 8570lm)



	C0	C90	C180	C270
0°	209	209	209	209
30°	171	171	171	171
60°	47	50	47	50
90°	0	0	0	0
120°	83	82	83	82
150°	162	159	162	159
180°	186	186	186	186
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	153 lm/W
Direct/Indirect	↓ 48% / ↑ 52%
System Power	56 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.2
UGR C90/C270	16.6
CIE Flux Codes	57 87 97 48 100
Ra/CRI	>80

LTS

Accessories



MILA-Z090.102
row installation kit for MILA-P



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series