





## JAMIE-T 201.927.FL

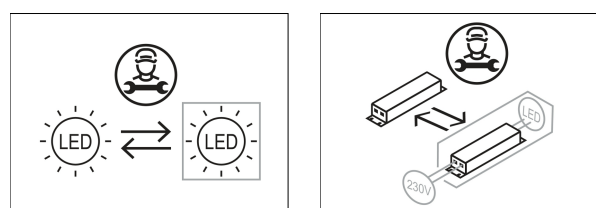

Colours	Article no.	EAN
silver	668346	4043544800084
black	668347	4043544800091
white	668348	4043544800107

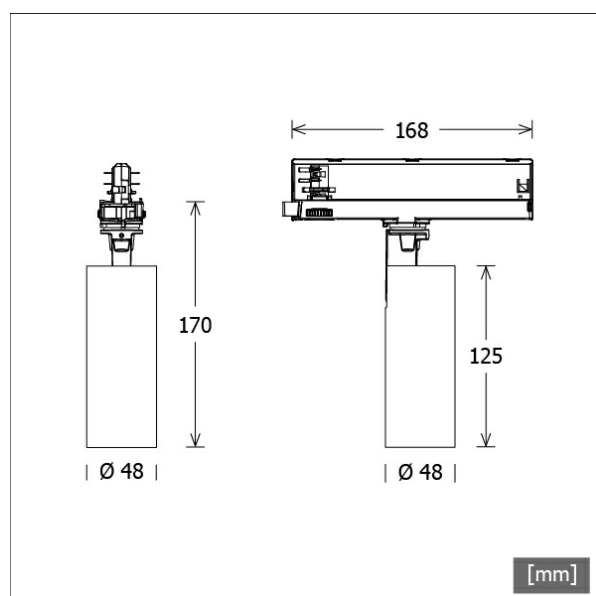

## Description

- flexible track-mounted mini spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- high-tech reflector lense made from PMMA for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- 3-phase track adapter with integrated ballast

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	951661
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	11.5 W
Luminaire luminous flux	950 lm
System efficiency	82.60 lm/W
Module efficiency	127.71 lm/W
UGR class	≤22
Beam range	Flood
Beam angle	39°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


## Dimensions / Weights

Length	168 mm
Width	48 mm
Height	170 mm
Diameter of light head	48 mm
Net weight	0.32 kg
Gross weight	0.42 kg

# JAMIE-T 201.927.FL

## JAMIE-T 201.927.FL

Jamie 200 (1xLED 12W 927/2700K 950lm)

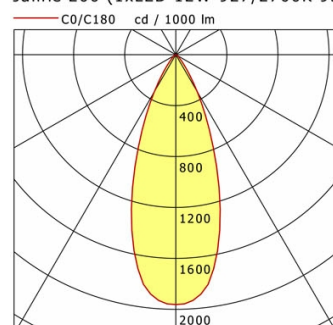

	C0	C90	C180	C270
0°	1963	1963	1963	1963
15°	1342	1342	1342	1342
30°	336	336	336	336
45°	48	48	48	48
60°	13	13	13	13
75°	5	5	5	5
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	2.12	207.2
6.0	4.23	51.8
9.0	6.35	23.0
12.0	8.46	12.9
15.0	10.58	8.3

<b>η</b>	LED
Efficiency	79 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.6
UGR C90/C270	21.6
CIE Flux Codes	94 98 100 100 100
Ra/CRI	>90

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)