


JAMIE-T 201.940.FL



| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 668364 | 4043544800268 |
| black | 668365 | 4043544800275 |
| white | 668366 | 4043544800282 |

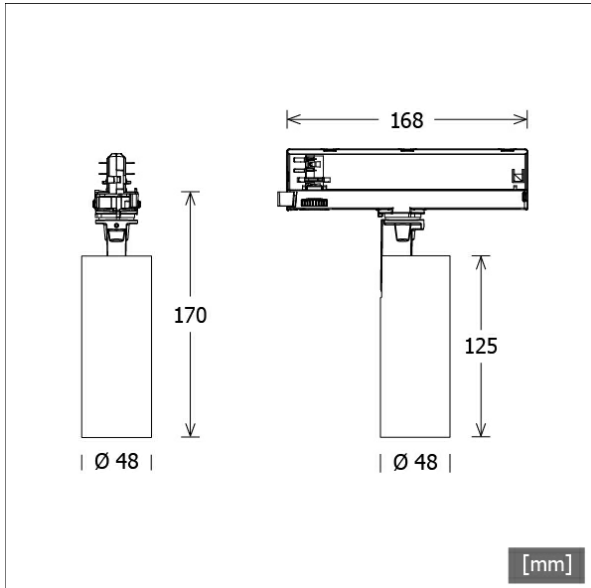

Description

- flexible track-mounted mini spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- high-tech reflector lens made from PMMA for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- 3-phase track adapter with integrated ballast

Standard options



Special options



Lighting data / Norms

| | |
|-------------------------|----------------------------|
| Lamps | LED Spot / CRI 90 / 4000 K |
| EPREL light sources | 854652 |
| | L90 B50 50.000 h |
| | L80 B50 100.000 h |
| | L80 B20 50.000 h |
| Lifetime | |
| System power | 11.5 W |
| Luminaire luminous flux | 1040 lm |
| System efficiency | 90.43 lm/W |
| Module efficiency | 140.96 lm/W |
| UGR class | ≤22 |
| Beam range | Flood |
| Beam angle | 39° |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | II |
| Type of protection | IP20 |


Dimensions / Weights

| | |
|------------------------|---------|
| Length | 168 mm |
| Width | 48 mm |
| Height | 170 mm |
| Diameter of light head | 48 mm |
| Net weight | 0.32 kg |
| Gross weight | 0.42 kg |

JAMIE-T 201.940.FL

JAMIE-T 201.940.FL

Jamie 200 (1xLED 12W 940/4000K 1040lm)



| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 1963 | 1963 | 1963 | 1963 |
| 15° | 1342 | 1342 | 1342 | 1342 |
| 30° | 336 | 336 | 336 | 336 |
| 45° | 48 | 48 | 48 | 48 |
| 60° | 13 | 13 | 13 | 13 |
| 75° | 5 | 5 | 5 | 5 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

| Offset [m] | Cone width [m] | Illuminance [lx] |
|---------------|----------------|------------------|
| C0-C180 Plane | | |
| 3.0 | 2.12 | 226.8 |
| 6.0 | 4.23 | 56.7 |
| 9.0 | 6.35 | 25.2 |
| 12.0 | 8.46 | 14.2 |
| 15.0 | 10.58 | 9.1 |

| | |
|--------------------|-------------------|
| η | LED |
| Efficiency | 87 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 12 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 21.9 |
| UGR C90/C270 | 21.9 |
| CIE Flux Codes | 94 98 100 100 100 |
| Ra/CRI | >90 |

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)