





JAMIE-T 201.940.WF

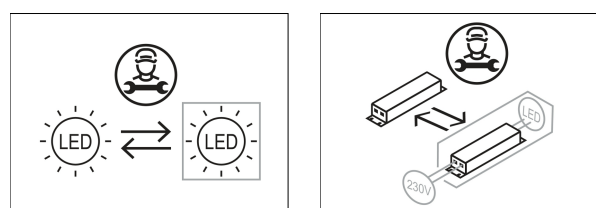

Colours	Article no.	EAN
silver	668367	4043544800299
black	668368	4043544800305
white	668369	4043544800312

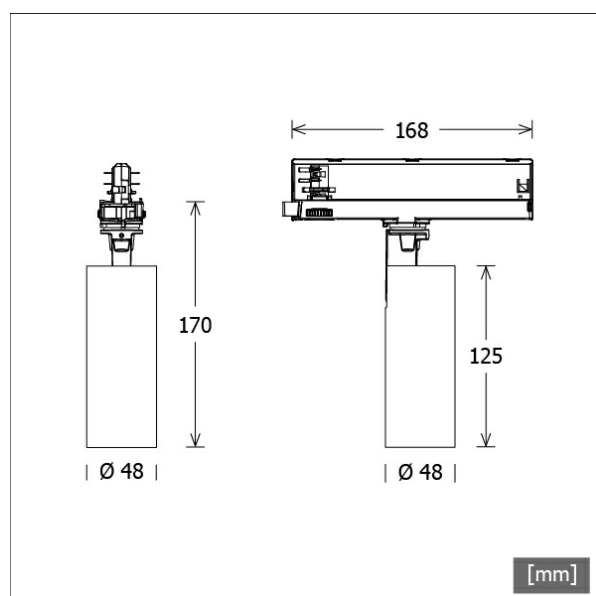

Description

- flexible track-mounted mini spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- high-tech reflector lens made from PMMA for high luminous efficiency and glare-free lighting
- cylindrical housing made from aluminium
- 3-phase track adapter with integrated ballast

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	854652
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	11.5 W
Luminaire luminous flux	710 lm
System efficiency	61.73 lm/W
Module efficiency	140.96 lm/W
UGR class	≤28
Beam range	Wide Flood
Beam angle	56°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Length	168 mm
Width	48 mm
Height	170 mm
Diameter of light head	48 mm
Net weight	0.32 kg
Gross weight	0.42 kg

JAMIE-T 201.940.WF

JAMIE-T 201.940.WF

Jamie 200 (1xLED 12W 940/4000K 710lm)

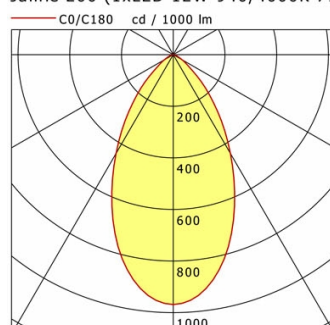

	C0	C90	C180	C270
0°	969	969	969	969
15°	795	795	795	795
30°	442	442	442	442
45°	165	165	165	165
60°	40	40	40	40
75°	10	10	10	10
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	3.21	76.4
6.0	6.43	19.1
9.0	9.64	8.5
12.0	12.85	4.8
15.0	16.07	3.1

η	LED
Efficiency	59 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.8
UGR C90/C270	26.8
CIE Flux Codes	80 96 99 100 100
Ra/CRI	>90

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)