




LK-L 070.10830.1685.1/DALI/NO



Colours	Article no.	EAN
	668054	4043544797117

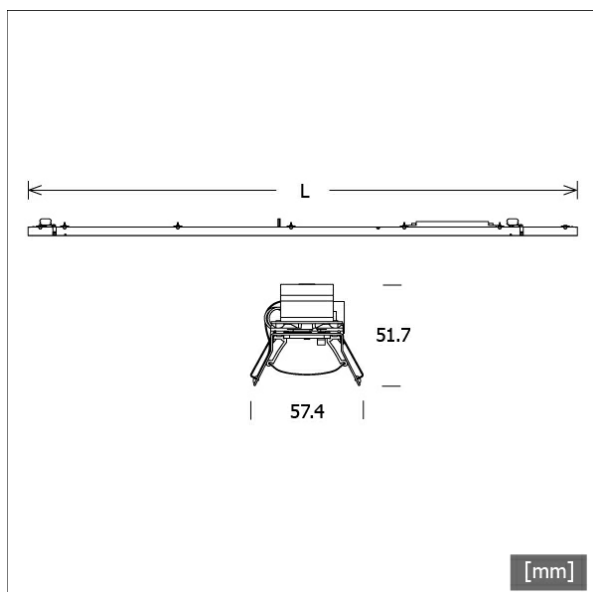

Description

- light-insert with integrated LED strips
- reflector made from traffic white painted aluminium sheet
- no UV and thermal emissions
- almost all strip light lengths can be realised
- 5-pole through-wiring kit included
- emergency lighting LED Driver with DALI interface and automatic test function
- non-maintained operation
- DALI interface for controlled testing and monitoring (if the DALI bus is not connected, the unit will operate in self-test mode)
- rated duration: 3 h
- automatic shutdown of the output if LED load is out of range
- constant power output: 2.5 W
- luminous flux: 260 lm
- patented addressing function (EZ easy addressing)
- electronic multi-level charge system
- connection options
- batteries: high-temperature cells (NiMH batteries 4 Ah / 3.6 V)
- typ. power factor at 230 V / 50 Hz: 0.45
- time to light: < 0.25 s from detection of emergency event
- overvoltage protection :320 V for 1 h
- ambient temperature: -20...+45 °C
- lifetime: 4 years with maximum 2 discharges every year
- mains voltage changeover threshold according to EN 60598-2-22
- pMMA matt foil for uniform light distribution
- tool-free snapping into Lichtkanal profile via mounting springs
- 5-pole terminal block, pre-fabricated for through-wiring
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	24.8 W
Luminaire luminous flux	max. 4000 lm
System efficiency	161.29 lm/W
Module efficiency	193.00 lm/W



LK-L 070.10830.1685.1/DALI/NO

UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I


Dimensions / Weights

Length	1685 mm
Width	57 mm
Height	52 mm
Net weight	2.70 kg
Gross weight	2.84 kg

LK-L 070.10830.1685.1/DALI/NO

LK-L 070.10830.1685.1/DALI/NO

Lichtkanal 070 | Light-Insert (APB, 1xLED 25W 830/3000K 4000lm)



	C0	C90	C180	C270
0°	511	511	511	511
15°	491	492	491	492
30°	344	435	344	435
45°	171	317	171	317
60°	59	106	59	106
75°	24	37	24	37
90°	0	0	0	0

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	4.61 7.23	227.1
6.0	9.23 14.46	56.8
9.0	13.84 21.69	25.2
12.0	18.46 28.93	14.2
15.0	23.07 36.16	9.1

η	LED
Efficiency	160 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.1
UGR C90/C270	22.4
CIE Flux Codes	63 90 98 100 100
Ra/CRI	>80

LTS

LK-L 070.10830.1685.1/DALI/NO

Lichtkanal 070 | Light-Insert (AOB, 1xLED 25W 830/3000K 3780lm)



	C0	C90	C180	C270
0°	404	404	404	404
15°	380	380	380	380
30°	314	316	314	316
45°	230	228	230	228
60°	144	140	144	140
75°	61	57	61	57
90°	1	1	1	1

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	7.11 7.01	169.8
6.0	14.22 14.02	42.4
9.0	21.33 21.02	18.9
12.0	28.43 28.03	10.6
15.0	35.54 35.04	6.8

η	LED
Efficiency	151 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.4
UGR C90/C270	24.1
CIE Flux Codes	51 81 96 100 100
Ra/CRI	>80

LTS

LK-L 070.10830.1685.1/DALI/NO

Lichtkanal 070 | Light-Insert (AOV-002/005.2, 1xLED 25W 830/3000K 3570lm)



	C0	C90	C180	C270
0°	315	315	315	315
30°	262	238	262	238
60°	148	103	148	103
90°	44	1	44	1
120°	31	0	31	0
150°	16	1	16	1
180°	1	1	1	1

cd / 1000 lm


Offset [m]	Cone width [m]	Illuminance [lx]
3.0	9.35 6.59	125.1
6.0	18.70 13.18	31.3
9.0	28.05 19.77	13.9
12.0	37.40 26.36	7.8
15.0	46.75 32.95	5.0

η	LED
Efficiency	143 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.9
UGR C90/C270	22.5
CIE Flux Codes	46 75 92 89 100
Ra/CRI	>80

LTS

LK-L 070.10830.1685.1/DALI/NO

Lichtkanal 070 | Light-Insert (AOV-001/003/005.1, 1xLED 25W 830/3000K 3570lm)



	C0	C90	C180	C270
0°	315	315	315	315
30°	262	238	262	238
60°	148	103	148	103
90°	44	1	44	1
120°	31	0	31	0
150°	16	1	16	1
180°	1	1	1	1

cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	9.35 6.59	125.1
6.0	18.70 13.18	31.3
9.0	28.05 19.77	13.9
12.0	37.40 26.36	7.8
15.0	46.75 32.95	5.0

η	LED
Efficiency	143 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.9
UGR C90/C270	22.5
CIE Flux Codes	46 75 92 89 100
Ra/CRI	>80

LTS