

## LK-L 070.10840.1685.1/DALI



## Description

- light-insert with integrated LED strips
- reflector made from traffic white painted aluminium sheet
- no UV and thermal emissions
- almost all strip light lengths can be realised
- 5-pole through-wiring kit included
- pMMA matt foil for uniform light distribution
- tool-free snapping into Lichtkanal profile via mounting springs
- 5-pole terminal block, pre-fabricated for through-wiring
- ballast (LED converter DALI, dimmable) integrated

## Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at  $\Delta T = 10$  Kelvin.

## Standard options

3000 K

## Special options

2700 K


CRI 90  
SDCM3

TWL

TWPI



| Colours | Article no. | EAN           |
|---------|-------------|---------------|
|         | 668050      | 4043544797070 |

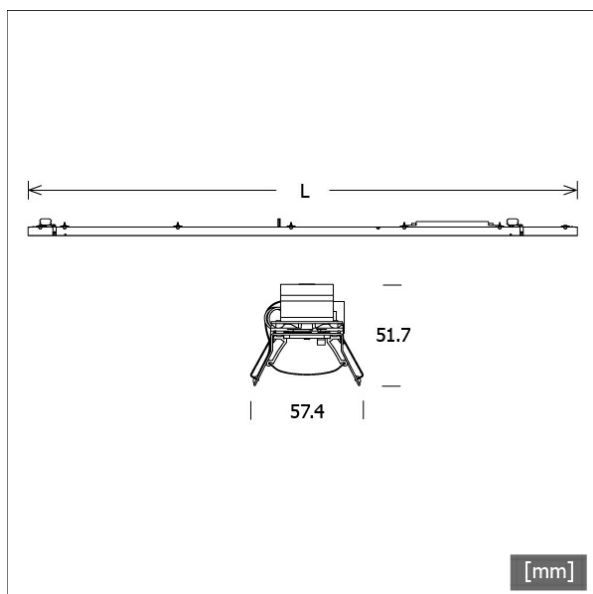

[mm]

## Lighting data / Norms

## Lamps

LED linear / CRI 80 / 4000 K

## Lifetime

L90 B50 50.000 h  
 L80 B50 100.000 h  
 L80 B20 50.000 h

## System power

24.8 W

## Luminaire luminous flux

max. 4240 lm

## System efficiency

170.96 lm/W

## Module efficiency

205.00 lm/W

## UGR class

≤28

## Supply voltage

220 - 240 V / 50 - 60 Hz

## Protection class

I

## Dimensions / Weights

## Length

1685 mm

## Width

57 mm

## Height



52 mm

## Net weight

2.26 kg

## Gross weight


2.38 kg



# LK-L 070.10840.1685.1/DALI

## LK-L 070.10840.1685.1/DALI

Lichtkanal 070 | Light-Insert (APB, 1xLED 25W 840/4000K 4240lm)



|     | C0  | C90 | C180 | C270 |
|-----|-----|-----|------|------|
| 0°  | 511 | 511 | 511  | 511  |
| 15° | 491 | 492 | 491  | 492  |
| 30° | 344 | 435 | 344  | 435  |
| 45° | 171 | 317 | 171  | 317  |
| 60° | 59  | 106 | 59   | 106  |
| 75° | 24  | 37  | 24   | 37   |
| 90° | 0   | 0   | 0    | 0    |

cd / 1000 lm


| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0        | 4.61   7.23    | 240.7            |
| 6.0        | 9.23   14.46   | 60.2             |
| 9.0        | 13.84   21.69  | 26.7             |
| 12.0       | 18.46   28.93  | 15.0             |
| 15.0       | 23.07   36.16  | 9.6              |

|                    |                  |
|--------------------|------------------|
| <b>η</b>           | LED              |
| Efficiency         | 170 lm/W         |
| Direct/Indirect    | ↓ 100% / ↑ 0%    |
| System Power       | 25 W             |
| <b>UGR</b>         | X=4H, Y=8H       |
| Reflection factors | 70/50/20         |
| UGR C0/C180        | 20.3             |
| UGR C90/C270       | 22.6             |
| CIE Flux Codes     | 63 90 98 100 100 |
| Ra/CRI             | >80              |

LTS

## LK-L 070.10840.1685.1/DALI

Lichtkanal 070 | Light-Insert (AOB, 1xLED 25W 840/4000K 4000lm)



|     | C0  | C90 | C180 | C270 |
|-----|-----|-----|------|------|
| 0°  | 404 | 404 | 404  | 404  |
| 15° | 380 | 380 | 380  | 380  |
| 30° | 314 | 316 | 314  | 316  |
| 45° | 230 | 228 | 230  | 228  |
| 60° | 144 | 140 | 144  | 140  |
| 75° | 61  | 57  | 61   | 57   |
| 90° | 1   | 1   | 1    | 1    |

cd / 1000 lm


| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0        | 7.11   7.01    | 179.6            |
| 6.0        | 14.22   14.02  | 44.9             |
| 9.0        | 21.33   21.02  | 20.0             |
| 12.0       | 28.43   28.03  | 11.2             |
| 15.0       | 35.54   35.04  | 7.2              |

|                    |                  |
|--------------------|------------------|
| <b>η</b>           | LED              |
| Efficiency         | 160 lm/W         |
| Direct/Indirect    | ↓ 100% / ↑ 0%    |
| System Power       | 25 W             |
| <b>UGR</b>         | X=4H, Y=8H       |
| Reflection factors | 70/50/20         |
| UGR C0/C180        | 24.6             |
| UGR C90/C270       | 24.3             |
| CIE Flux Codes     | 51 81 96 100 100 |
| Ra/CRI             | >80              |

LTS

## LK-L 070.10840.1685.1/DALI

Lichtkanal 070 | Light-Insert (AOV-002/005.2, 1xLED 25W 840/4000K 3780lm)



|      | C0  | C90 | C180 | C270 |
|------|-----|-----|------|------|
| 0°   | 315 | 315 | 315  | 315  |
| 30°  | 262 | 238 | 262  | 238  |
| 60°  | 148 | 103 | 148  | 103  |
| 90°  | 44  | 1   | 44   | 1    |
| 120° | 31  | 0   | 31   | 0    |
| 150° | 16  | 1   | 16   | 1    |
| 180° | 1   | 1   | 1    | 1    |

cd / 1000 lm


| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0        | 9.35   6.59    | 132.4            |
| 6.0        | 18.70   13.18  | 33.1             |
| 9.0        | 28.05   19.77  | 14.7             |
| 12.0       | 37.40   26.36  | 8.3              |
| 15.0       | 46.75   32.95  | 5.3              |

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 151 lm/W        |
| Direct/Indirect    | ↓ 89% / ↑ 11%   |
| System Power       | 25 W            |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 26.1            |
| UGR C90/C270       | 22.7            |
| CIE Flux Codes     | 46 75 92 89 100 |
| Ra/CRI             | >80             |

LTS

## LK-L 070.10840.1685.1/DALI

Lichtkanal 070 | Light-Insert (AOV-001/003/005.1, 1xLED 25W 840/4000K 3780lm)



|      | C0  | C90 | C180 | C270 |
|------|-----|-----|------|------|
| 0°   | 315 | 315 | 315  | 315  |
| 30°  | 262 | 238 | 262  | 238  |
| 60°  | 148 | 103 | 148  | 103  |
| 90°  | 44  | 1   | 44   | 1    |
| 120° | 31  | 0   | 31   | 0    |
| 150° | 16  | 1   | 16   | 1    |
| 180° | 1   | 1   | 1    | 1    |

cd / 1000 lm

| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0        | 9.35   6.59    | 132.4            |
| 6.0        | 18.70   13.18  | 33.1             |
| 9.0        | 28.05   19.77  | 14.7             |
| 12.0       | 37.40   26.36  | 8.3              |
| 15.0       | 46.75   32.95  | 5.3              |

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 151 lm/W        |
| Direct/Indirect    | ↓ 89% / ↑ 11%   |
| System Power       | 25 W            |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 26.1            |
| UGR C90/C270       | 22.7            |
| CIE Flux Codes     | 46 75 92 89 100 |
| Ra/CRI             | >80             |

LTS