



CSARL 71.5030.50



Colours	Article no.	EAN
black	649875	4043544577788
silver	649876	4043544577795
white	649877	4043544577801

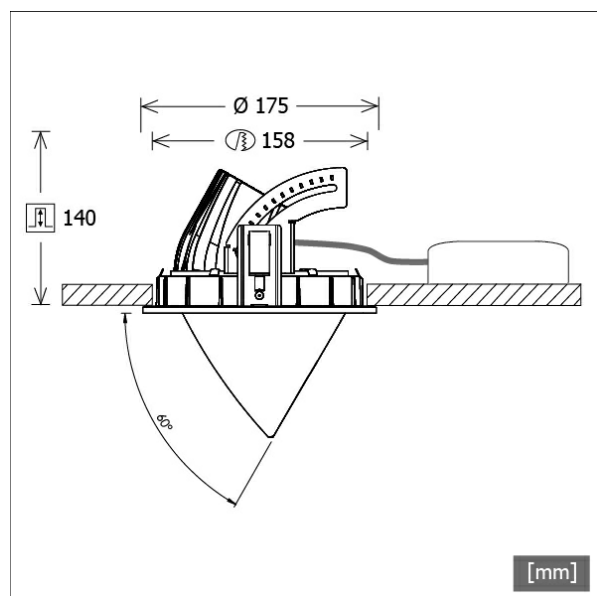

Description

- recessed spotlight with conical light-head
- suitable for lighting of vertical surfaces (shadowless wall lighting up to the ceiling edge)
- light-head rotates through 355° and pivots out through 60°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from die-cast aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring and light-head made from die-cast zinc
- clear and reflection-free EnergyVision safety glass
- tool-free ceiling mounting via quick-action clamping springs (safety rope, automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848104
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	52.0 W
Luminaire luminous flux	5400 lm
System efficiency	103.84 lm/W
Module efficiency	163.73 lm/W
UGR class	≤25
Beam range	Wide Flood
Beam angle	54°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Outer diameter	175 mm
Height	145 mm
Cut-out (Ø)	158 mm
Ceiling thickness	1.0 - 25.0 mm

Recessed Spotlights · CSA 71 Round

CSARL 71.5030.50

Recessed depth
Diameter of light head
Net weight
Gross weight




LTS
LOVE TO SHINE

140 mm
114 mm
2.74 kg
2.84 kg

CSARL 71.5030.50

CSA 71 Round (1xLED 52W 830/3000K 5400lm 50 °)

— C0/C180 — cd / 1000 lm



	C0	C90	C180	C270
0°	1315	1315	1315	1315
15°	1105	1105	1105	1105
30°	527	527	527	527
45°	26	26	26	26
60°	10	10	10	10
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	3.05	788.9
6.0	6.10	197.2
9.0	9.15	87.7
12.0	12.21	49.3
15.0	15.26	31.6

η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	52 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.9
UGR C90/C270	22.9
CIE Flux Codes	96 99 100 100 100
Ra/CRI	>80

LTS

Accessories



ZDAR 158.200-265
compensation ring for ceiling cut-outs from 200 to 265 mm