


CSARL 71.5030.50/DALI



Colours	Article no.	EAN
black	649878	4043544577818
silver	649879	4043544577825
white	649880	4043544577832

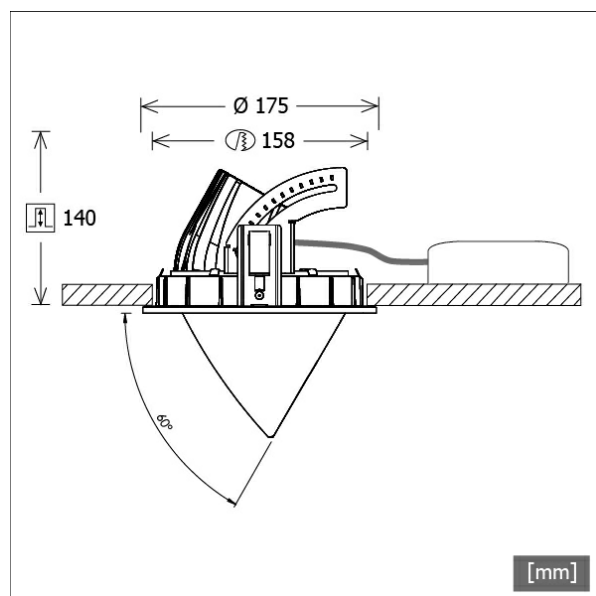

Description

- recessed spotlight with conical light-head
- suitable for lighting of vertical surfaces (shadowless wall lighting up to the ceiling edge)
- light-head rotates through 355° and pivots out through 60°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from die-cast aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring and light-head made from die-cast zinc
- clear and reflection-free EnergyVision safety glass
- tool-free ceiling mounting via quick-action clamping springs (safety rope, automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848104
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	52.0 W
Luminaire luminous flux	5400 lm
System efficiency	103.84 lm/W
Module efficiency	163.73 lm/W
UGR class	≤25
Beam range	Wide Flood
Beam angle	54°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Outer diameter	175 mm
Height	145 mm
Cut-out (Ø)	158 mm
Ceiling thickness	1.0 - 25.0 mm

Recessed Spotlights · CSA 71 Round

CSARL 71.5030.50/DALI

Recessed depth
Diameter of light head
Net weight
Gross weight




LTS
LOVE TO SHINE

140 mm
114 mm
2.75 kg
2.89 kg

CSARL 71.5030.50/DALI

CSA 71 Round (1xLED 52W 830/3000K 5400lm 50 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	1315	1315	1315	1315
15°	1105	1105	1105	1105
30°	527	527	527	527
45°	26	26	26	26
60°	10	10	10	10
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	3.05	788.9
6.0	6.10	197.2
9.0	9.15	87.7
12.0	12.21	49.3
15.0	15.26	31.6

η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	52 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.9
UGR C90/C270	22.9
CIE Flux Codes	96 99 100 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting