


# JETT-R 102.930.WF/DALI



Colours	Article no.	EAN
silver	668763	4043544804341
black	668764	4043544804358
white	668765	4043544804365

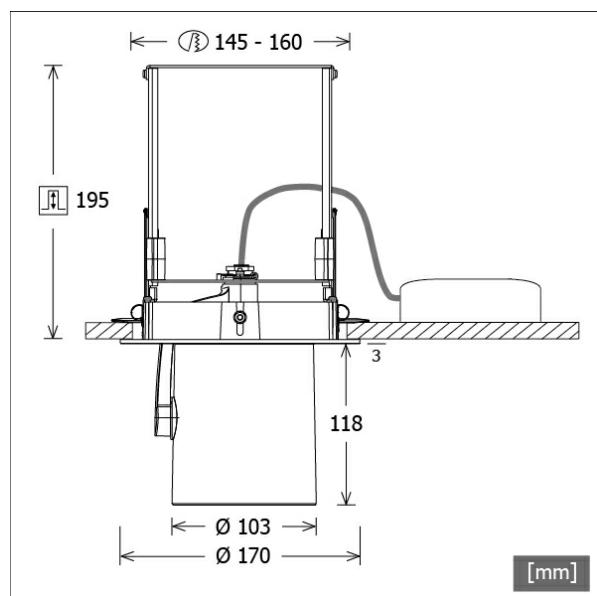

## Description

- flexible recessed spotlight with cylindrical light-head
- light-head completely extracts, rotates through 355° and pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed frame made from aluminium and sheet steel
- concealing plate for ceiling opening
- clear safety glass
- tool-free ceiling mounting via automatic quick clamping (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

## Standard options



## Special options



## Lighting data / Norms

<b>Lamps</b>	LED Spot / CRI 90 / 3000 K
<b>Lifetime</b>	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
<b>System power</b>	17.3 W
<b>Luminaire luminous flux</b>	2220 lm
<b>System efficiency</b>	128.32 lm/W
<b>Module efficiency</b>	137.00 lm/W
<b>UGR class</b>	≤19
<b>Beam range</b>	Wide Flood
<b>Beam angle</b>	50°
<b>Supply voltage</b>	220 - 240 V / 50 - 60 Hz
<b>Protection class</b>	II
<b>Type of protection</b>	IP20


## Dimensions / Weights

<b>Outer diameter</b>	170 mm
<b>Height</b>	198 mm
<b>Cut-out (Ø)</b>	145 mm
<b>Ceiling thickness</b>	5.0 - 50.0 mm
<b>Recessed depth</b>	195 mm
<b>Diameter of light head</b>	103 mm
<b>Net weight</b>	1.89 kg
<b>Gross weight</b>	1.99 kg

# JETT-R 102.930.WF/DALI

## JETT-R 102.930.WF/DALI

Jett Evo | Recessed (1xLED 17W 930/3000K 2220lm 50°)



	C0	C90	C180	C270
0°	1548	1548	1548	1548
15°	1274	1274	1274	1274
30°	490	490	490	490
45°	18	18	18	18
60°	7	7	7	7
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.77	381.9
6.0	5.54	95.5
9.0	8.31	42.4
12.0	11.08	23.9
15.0	13.85	15.3

<b>η</b>	LED
Efficiency	131 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	17 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.4
UGR C90/C270	18.4
CIE Flux Codes	97 99 100 100 100
Ra/CRI	> 90

LTS

## Accessories



**FOCUS 100.1**  
superior optic with focusable biconvex lens for  
accent lighting



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-R SENSOR**  
Organic Response sensor for recessed mounting



**ZBK 96**  
anti-glare flaps



**ZBW 83**  
honeycomb louvre



**ZDAR 158.200-265**  
compensation ring for ceiling cut-outs from 200 to  
265 mm



**ZDVR 0157**  
ceiling reinforcement ring