


JETT-T 102.927.SP



| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 668371 | 4043544800336 |
| black | 668372 | 4043544800343 |
| white | 668373 | 4043544800350 |

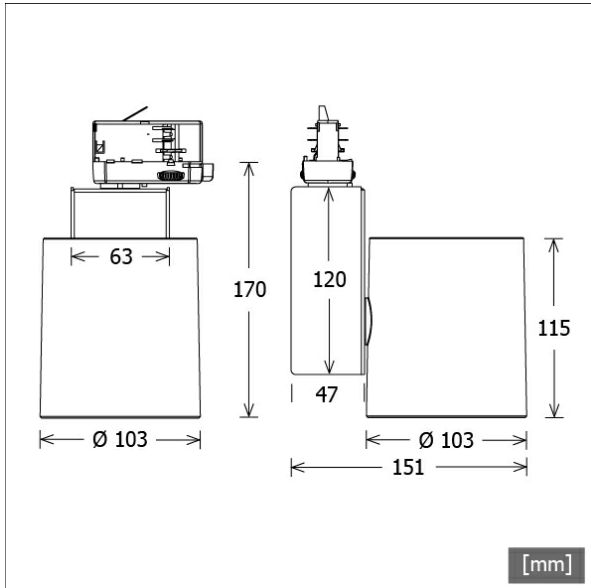

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

| | |
|-------------------------|---|
| Lamps | LED Spot / CRI 90 / 2700 K |
| EPREL light sources | 1115627 |
| Lifetime | L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h |
| System power | 17.3 W |
| Luminaire luminous flux | 2210 lm |
| System efficiency | 127.74 lm/W |
| Module efficiency | 134.07 lm/W |
| UGR class | ≤19 |
| Beam range | Spot |
| Beam angle | 16° |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | I |
| Type of protection | IP20 |


Dimensions / Weights

| | |
|------------------------|---------|
| Length | 151 mm |
| Width | 103 mm |
| Height | 170 mm |
| Diameter of light head | 103 mm |
| Net weight | 1.28 kg |
| Gross weight | 1.35 kg |

JETT-T 102.927.SP

JETT-T 102.927.SP

Jett Evo | Track-Mounted (1xLED 17W 927/2700K 2210lm 16°)



| | C0 | C90 | C180 | C270 |
|--------------|------|------|------|------|
| 0° | 5791 | 5791 | 5791 | 5791 |
| 15° | 1094 | 1094 | 1094 | 1094 |
| 30° | 371 | 371 | 371 | 371 |
| 45° | 10 | 10 | 10 | 10 |
| 60° | 7 | 7 | 7 | 7 |
| 75° | 1 | 1 | 1 | 1 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0 | 0.87 | 1422.0 |
| 6.0 | 1.73 | 355.5 |
| 9.0 | 2.60 | 158.0 |
| 12.0 | 3.47 | 88.9 |
| 15.0 | 4.33 | 56.9 |

| | |
|--------------------|--------------------|
| η | LED |
| Efficiency | 130 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 17 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 16.5 |
| UGR C90/C270 | 16.5 |
| CIE Flux Codes | 98 100 100 100 100 |
| Ra/CRI | >90 |

LTS

Accessories



FOCUS 100.1
superior optic with focusable biconvex lens for
accent lighting



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data
bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data
bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data
bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data
bus
(length: 4000 mm)



ST-A MONO/9000-BPU-D
3-phase surface-mounted monopoint with bus
option



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ST-E MONO/9000-BPU-D
3-phase recessed monopoint with bus option



ZBK 96
anti-glare flaps

Track-Mounted Spotlights · Jett Evo Power Track



JETT-T 102.927.SP

Accessories



ZBW 83
honeycomb louvre