

## JETT-T 102.927.WF/DALI-ST



## Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

## Standard options



## Special options






Colours	Article no.	EAN
silver	668393	4043544800541
black	668394	4043544800558
white	668395	4043544800565

## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	1115627
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	17.3 W
Luminaire luminous flux	2170 lm
System efficiency	125.43 lm/W
Module efficiency	134.07 lm/W
UGR class	≤19
Beam range	Wide Flood
Beam angle	50°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

## Dimensions / Weights


Length	154 mm
Width	103 mm
Height	177 mm
Diameter of light head	103 mm
Net weight	1.31 kg
Gross weight	1.38 kg

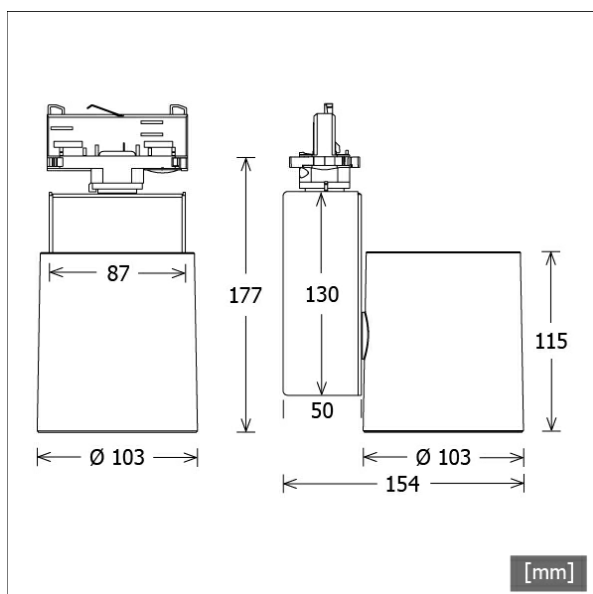

# JETT-T 102.927.WF/DALI-ST

## JETT-T 102.927.WF/DALI-ST

Jett Evo | Track-Mounted (1xLED 17W 927/2700K 2170lm 50°)



	C0	C90	C180	C270
0°	1548	1548	1548	1548
15°	1274	1274	1274	1274
30°	490	490	490	490
45°	18	18	18	18
60°	7	7	7	7
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.77	373.3
6.0	5.54	93.3
9.0	8.31	41.5
12.0	11.08	23.3
15.0	13.85	14.9

C0-C180 Plane

<b>η</b>	LED
Efficiency	128 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	17 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.4
UGR C90/C270	18.4
CIE Flux Codes	97 99 100 100 100
Ra/CRI	> 90

LTS

## Accessories



**FOCUS 100.1**  
superior optic with focusable biconvex lens for  
accent lighting



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 2000 mm)




**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 4000 mm)




**ST-A MONO/9000-BPU-D**  
3-phase surface-mounted monopoint with bus  
option



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
3-phase recessed monopoint with bus option



**ZB-OR DONGLE**  
Organic Response IR dongle kit

# JETT-T 102.927.WF/DALI-ST

## Accessories



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting



**ZBK 96**  
anti-glare flaps



**ZBW 83**  
honeycomb louvre