

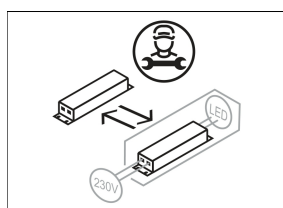


## JETT-T 102.B.WF

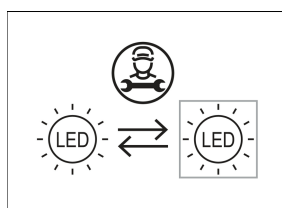

Colours	Article no.	EAN
silver	668620	4043544802811
black	668621	4043544802828
white	668622	4043544802835

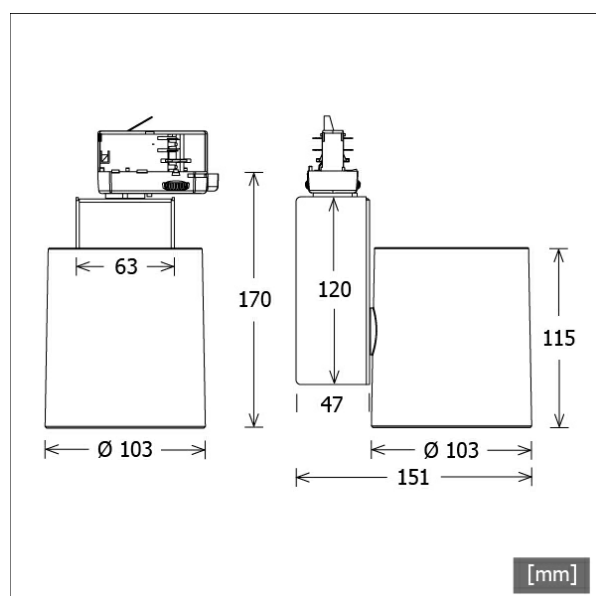

## Description

- flexible track-mounted spotlight in separated design with cylindrical light-head for special lighting of bakery products
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

## Standard options



## Lighting data / Norms

Lamps	LED Spot Bakery / CRI 82
EPREL light sources	832579
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	36.1 W
Luminaire luminous flux	3460 lm
System efficiency	95.84 lm/W
Module efficiency	109.90 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	50°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

## Dimensions / Weights


Length	151 mm
Width	103 mm
Height	170 mm
Diameter of light head	103 mm
Net weight	1.28 kg
Gross weight	1.35 kg

# JETT-T 102.B.WF

## JETT-T 102.B.WF

Jett Evo | Track-Mounted (1xLED 36W BAKERY 3460lm 50°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	1444	1444	1444	1444
15°	1266	1266	1266	1266
30°	517	517	517	517
45°	8	8	8	8
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	2.96	555.1
6.0	5.91	138.8
9.0	8.87	61.7
12.0	11.82	34.7
15.0	14.78	22.2

<b>η</b>	LED
Efficiency	96 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	36 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.3
UGR C90/C270	20.3
CIE Flux Codes	98 99 100 100 100
Ra/CRI	---

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data bus  
(length: 4000 mm)



**ST-A MONO/9000-BPU-D**  
3-phase surface-mounted monopoint with bus option



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
3-phase recessed monopoint with bus option



**ZBK 96**  
anti-glare flaps



**ZBW 83**  
honeycomb louvre