



JETT-T 102.M.FL



Colours	Article no.	EAN
silver	668626	4043544802873
black	668627	4043544802880
white	668628	4043544802897

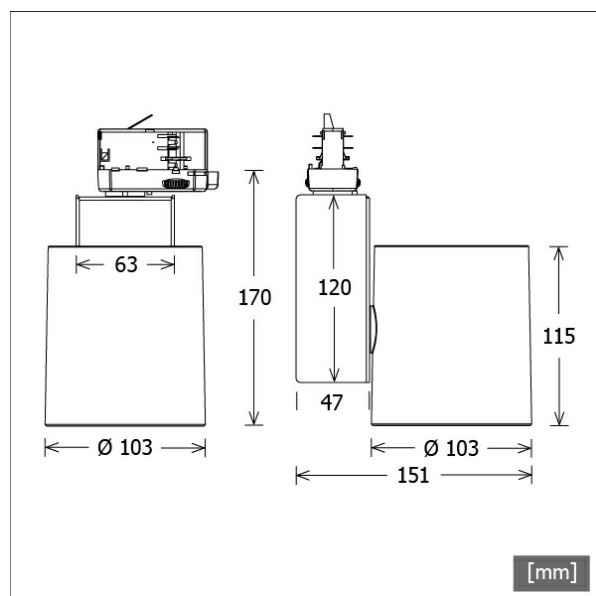

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head for special lighting of meat and sausage products
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Lighting data / Norms

Lamps	LED Spot Meat
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	34.6 W
Luminaire luminous flux	1810 lm
System efficiency	52.31 lm/W
Module efficiency	76.00 lm/W
UGR class	≤19
Beam range	Flood
Beam angle	36°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	151 mm
Width	103 mm
Height	170 mm
Diameter of light head	103 mm
Net weight	1.28 kg
Gross weight	1.35 kg

JETT-T 102.M.FL

JETT-T 102.M.FL

Jett Evo | Track-Mounted (1xLED 35W MEAT 1810lm 36°)



	C0	C90	C180	C270
0°	2558	2558	2558	2558
15°	1460	1460	1460	1460
30°	383	383	383	383
45°	9	9	9	9
60°	4	4	4	4
75°	2	2	2	2
90°	0	0	0	0

cd / 1000 lm

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.75	514.5
6.0	3.51	128.6
9.0	5.26	57.2
12.0	7.02	32.2
15.0	8.77	20.6

C0-C180 Plane

η	LED
Efficiency	52 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	35 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.6
UGR C90/C270	16.6
CIE Flux Codes	98 99 100 100 100
Ra/CRI	---

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-A MONO/9000-BPU-D
 3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ST-E MONO/9000-BPU-D
 3-phase recessed monopoint with bus option



ZBK 96
 anti-glare flaps



ZBW 83
 honeycomb louvre