

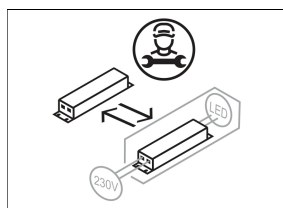


TIMR-PT 201.927.MF/DALI-ST

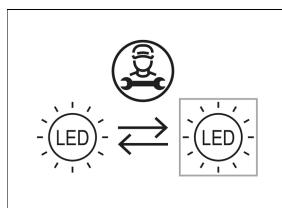

Colours	Article no.	EAN
ash	665500	4043544794857

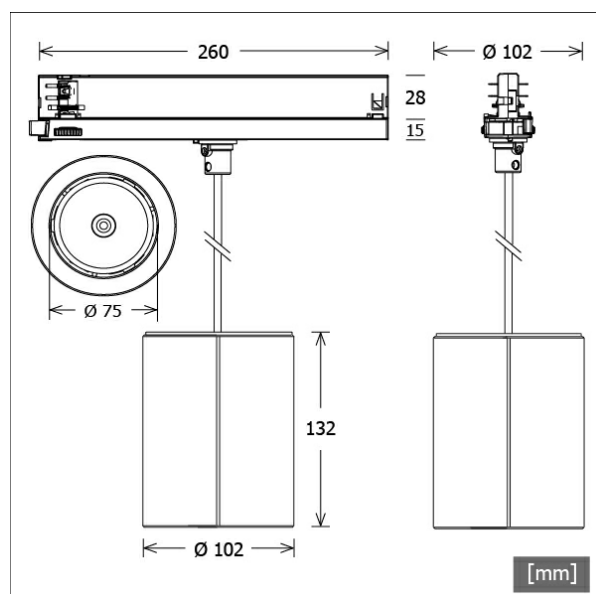

Description

- sustainable pendant luminaire with cylindrical ash wood housing
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management via integrated aluminium support frame (no heat sink required)
- high-tech reflector lense made from PMMA for high luminous efficiency and glare-free lighting
- suspension with black textile cable (2 x 0.5 mm², length: 1500 mm)
- 3-phase track adapter (ONETrack) with integrated DALI ballast

Notes

Compatible with power tracks ONETrack and Global Trac PULSE. Not compatible with ONETrack Trimless tracks. Wood is a natural product, variations in grain are to be expected. The wood used here is untreated and therefore very susceptible to oil and dirt.

Standard options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	1115627
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	13.4 W
Luminaire luminous flux	1730 lm
System efficiency	129.10 lm/W
Module efficiency	134.07 lm/W
UGR class	≤22
Beam range	Medium Flood
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	102 mm
Inner diameter	75 mm
Height	132 mm
Net weight	0.90 kg
Gross weight	0.94 kg

TIMR-PT 201.927.MF/DALI-ST

TIMR-PT 201.927.MF/DALI-ST

Timba Round | Pendant | Track (1xLED 13W 827/2700K 1730lm)

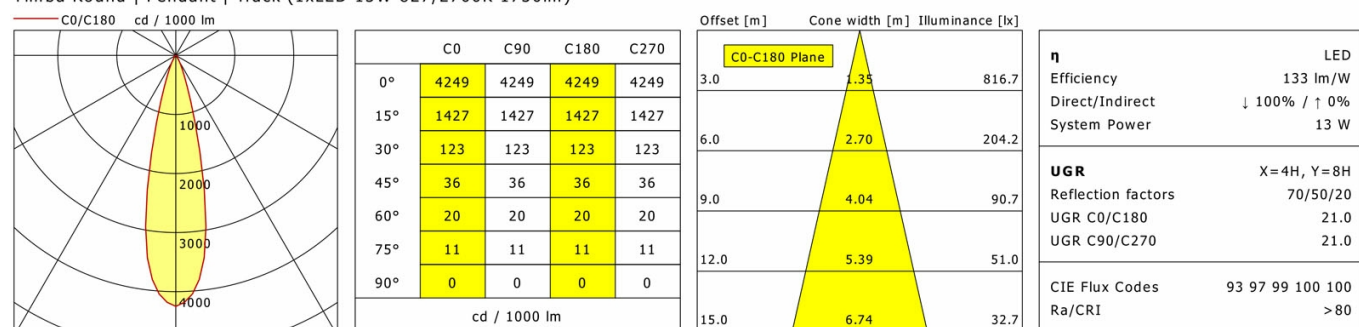

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ZB-OR DONGLE
 Organic Response IR dongle kit



ZB-OR GATEWAY
 Organic Response IoT Gateway Cascade Series



ZB-OR-T SENSOR
 Organic Response sensor for track mounting