




TIMR-PT 201.930.EW

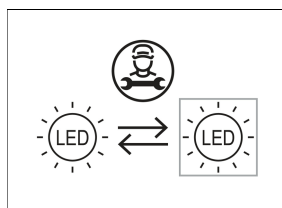

Colours	Article no.	EAN
ash	665505	4043544794901

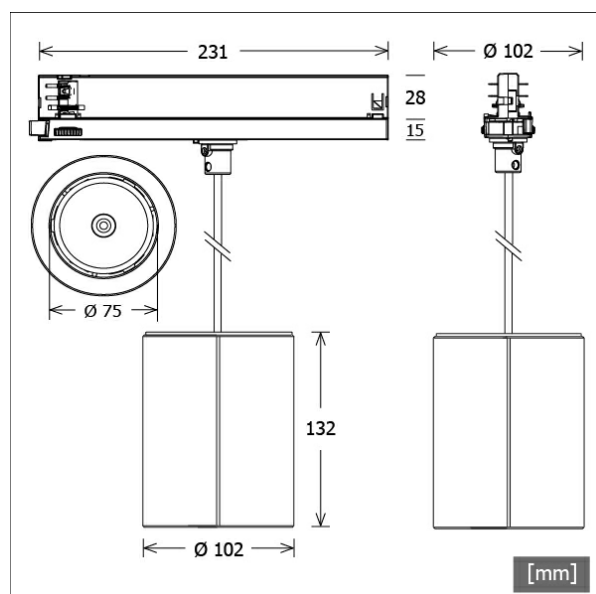

Description

- sustainable pendant luminaire with cylindrical ash wood housing
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management via integrated aluminium support frame (no heat sink required)
- high-tech reflector lense made from PMMA for high luminous efficiency and glare-free lighting
- suspension with black textile cable (2 x 0.5 mm², length: 1500 mm)
- 3-phase track adapter with integrated ballast

Notes

Not compatible with ONETrack Trimless tracks. Wood is a natural product, variations in grain are to be expected. The wood used here is untreated and therefore very susceptible to oil and dirt.

Standard options



Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	1024000
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	13.4 W
System power	1790 lm
Luminaire luminous flux	133.58 lm/W
System efficiency	136.81 lm/W
Module efficiency	≤25
UGR class	Extra Wide Flood
Beam range	65°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	II
Protection class	IP20
Type of protection	

Dimensions / Weights


Outer diameter	102 mm
Inner diameter	75 mm
Height	132 mm
Net weight	0.88 kg
Gross weight	0.92 kg

TIMR-PT 201.930.EW

TIMR-PT 201.930.EW

Timba Round | Pendant | Track (1xLED 13W 830/3000K 1790lm)

— C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	828	828	828	828
15°	871	871	871	871
30°	539	539	539	539
45°	92	92	92	92
60°	28	28	28	28
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	3.81	164.6
6.0	7.61	41.2
9.0	11.42	18.3
12.0	15.23	10.3
15.0	19.03	6.6

η	LED
Efficiency	138 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.9
UGR C90/C270	23.9
CIE Flux Codes	87 97 99 100 100
Ra/CRI	>80

LTS