




STRL-J 105.30.25



Colours	Article no.	EAN
black	649570	4043544574701
silver	649571	4043544574718
white	649572	4043544574725

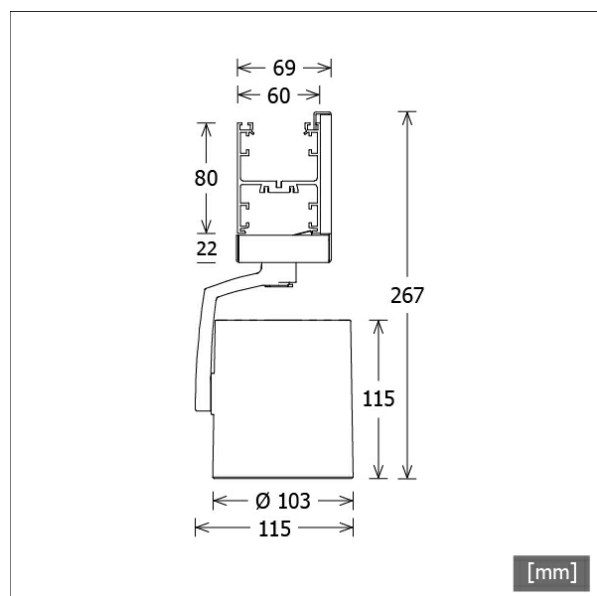

Description

- mounting spotlight for StraitLine 60 light-line with clear and cylindrical light-head design
- light-head rotates through 355° and pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast insertable into StraitLine profile
- clear and reflection-free EnergyVision safety glass
- tool-free mounting of the spotlight in profile
- simple plug connection (distributor connector included)
- ballast (LED converter) included


Notes

Not suitable for StraitLine profiles with a length of 845 mm. Profile with a length of 1125 mm are only suitable for one mounting spotlight.

Standard options



Special options

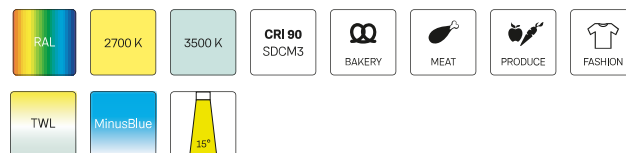

Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848104
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	50.0 W
Luminaire luminous flux	5530 lm
System efficiency	110.60 lm/W
Module efficiency	163.73 lm/W
UGR class	≤22
Beam angle	25°
Supply voltage	220 - 240 V / 50 - 60 Hz


Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	103 mm
Height	267 mm
Diameter of light head	103 mm
Net weight	1.28 kg
Gross weight	1.40 kg

STRL-J 105.30.25

StraitLine 60 - Mounting Spotlight (1xLED 50W 830/3000K 5530lm 25 °)

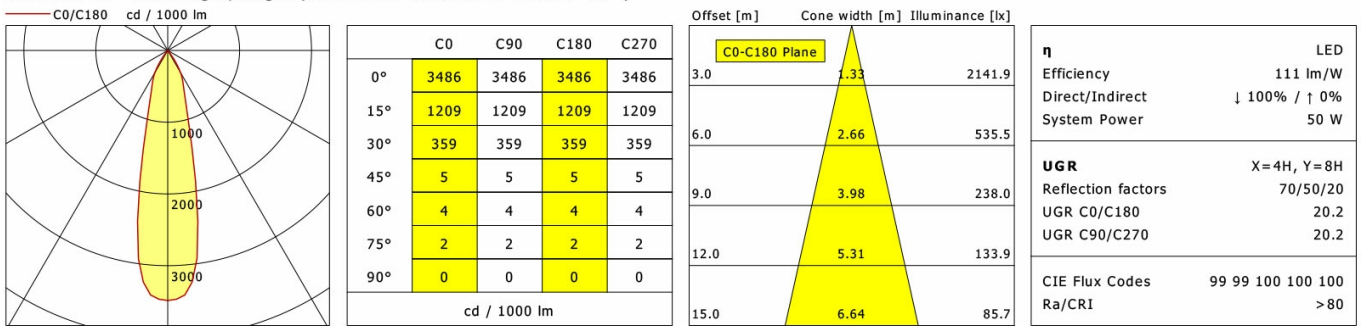

LTS

Accessories



FOCUS 100.1
superior optic with focusable biconvex lens for
accent lighting



ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre