

## JETT-T 104.940.FL/DALI-ST



## Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

## Standard options



## Special options






Colours	Article no.	EAN
silver	668551	4043544802125
black	668552	4043544802132
white	668553	4043544802149

## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	1181986
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	35.9 W
Luminaire luminous flux	4380 lm
System efficiency	122.00 lm/W
Module efficiency	140.79 lm/W
UGR class	≤19
Beam range	Flood
Beam angle	36°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

## Dimensions / Weights


Length	154 mm
Width	103 mm
Height	177 mm
Diameter of light head	103 mm
Net weight	1.31 kg
Gross weight	1.38 kg

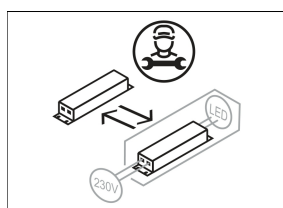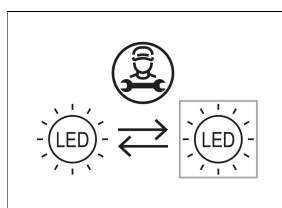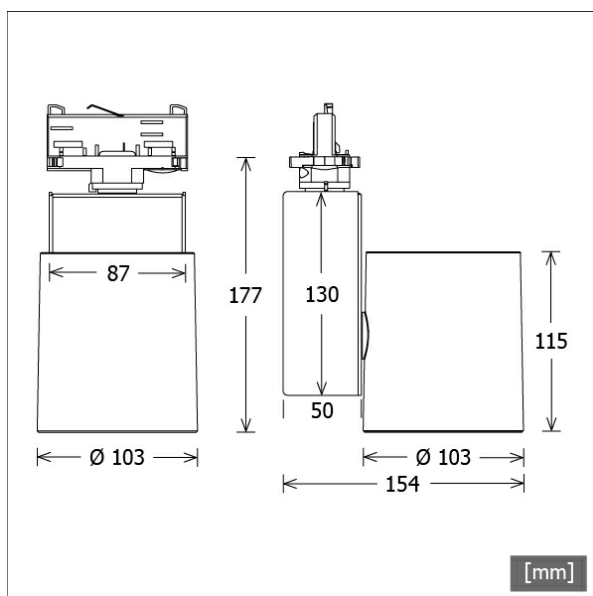

# JETT-T 104.940.FL/DALI-ST

## JETT-T 104.940.FL/DALI-ST

Jett Evo | Track-Mounted (1xLED 36W 940/4000K 4380lm 36°)

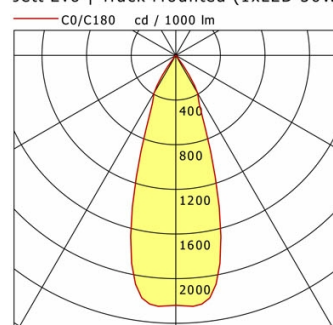

	C0	C90	C180	C270
0°	2239	2239	2239	2239
15°	1546	1546	1546	1546
30°	392	392	392	392
45°	11	11	11	11
60°	2	2	2	2
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.97	1089.5
6.0	3.95	272.4
9.0	5.92	121.1
12.0	7.89	68.1
15.0	9.86	43.6

<b>η</b>	LED
Efficiency	122 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	36 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.2
UGR C90/C270	19.2
CIE Flux Codes	99 100 100 100 100
Ra/CRI	> 90

LTS

## Accessories



**FOCUS 100.1**  
superior optic with focusable biconvex lens for  
accent lighting



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 4000 mm)




**ST-A MONO/9000-BPU-D**  
3-phase surface-mounted monopoint with bus  
option



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
3-phase recessed monopoint with bus option



**ZB-OR DONGLE**  
Organic Response IR dongle kit

# JETT-T 104.940.FL/DALI-ST

## Accessories



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting



**ZBK 96**  
anti-glare flaps



**ZBW 83**  
honeycomb louvre