

JETT-T 104.940.MF/DALI-ST



Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






Colours	Article no.	EAN
silver	668545	4043544802064
black	668546	4043544802071
white	668547	4043544802088

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	1181986
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	35.9 W
Luminaire luminous flux	4500 lm
System efficiency	125.34 lm/W
Module efficiency	140.79 lm/W
UGR class	≤22
Beam range	Medium Flood
Beam angle	26°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	154 mm
Width	103 mm
Height	177 mm
Diameter of light head	103 mm
Net weight	1.31 kg
Gross weight	1.38 kg

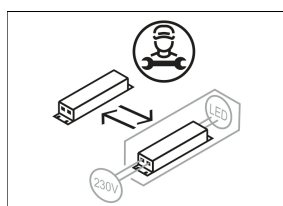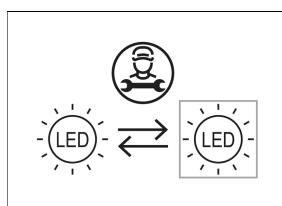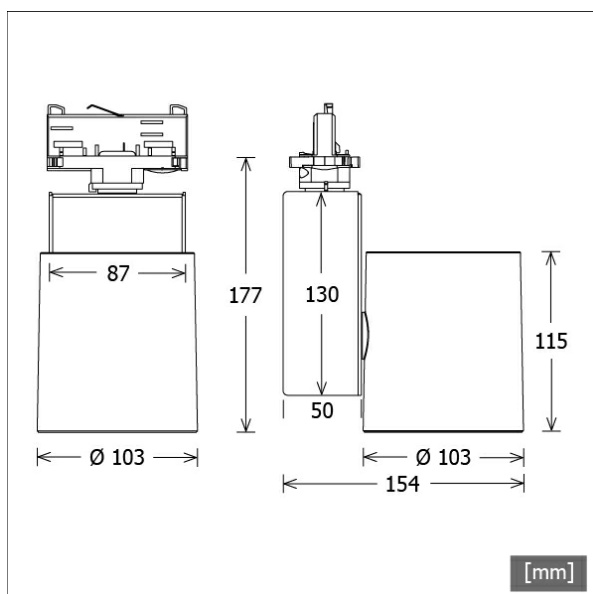







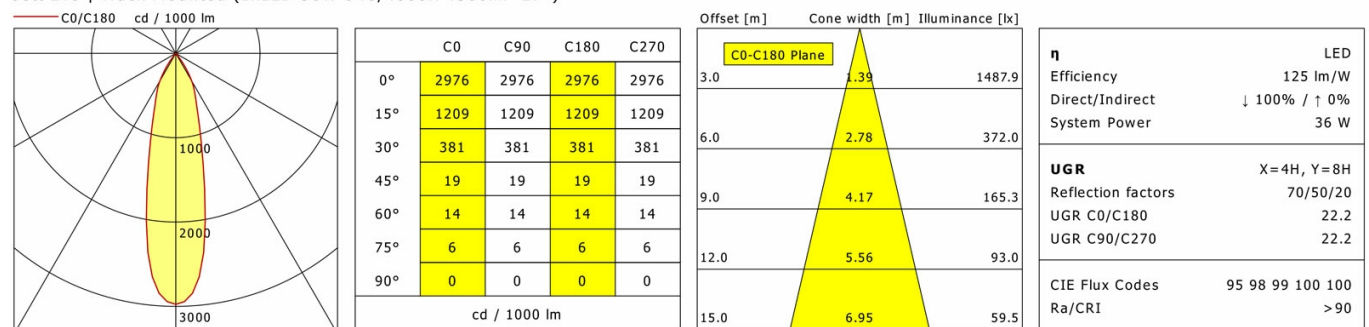





JETT-T 104.940.MF/DALI-ST

JETT-T 104.940.MF/DALI-ST

Jett Evo | Track-Mounted (1xLED 36W 940/4000K 4500lm 27°)



Accessories

	FOCUS 100.1 superior optic with focusable biconvex lens for accent lighting		ST-A 10/9000A-1-ST surface-mounted track ONETrack Advance with data bus (length: 1000 mm)
	ST-A 20/9000A-2-ST surface-mounted track ONETrack Advance with data bus (length: 2000 mm)		ST-A 30/9000A-3-ST surface-mounted track ONETrack Advance with data bus (length: 3000 mm)
	ST-A 40/9000A-4-ST surface-mounted track ONETrack Advance with data bus (length: 4000 mm)		ST-A MONO/9000-BPU-D 3-phase surface-mounted monopoint with bus option
	ST-E 10/9000-1-R recessed track ONETrack with data bus (length: 1000 mm)		ST-E 20/9000-2-R recessed track ONETrack with data bus (length: 2000 mm)
	ST-E 30/9000-3-R recessed track ONETrack with data bus (length: 3000 mm)		ST-E 40/9000-4-R recessed track ONETrack with data bus (length: 4000 mm)
	ST-E MONO/9000-BPU-D 3-phase recessed monopoint with bus option		ZB-OR DONGLE Organic Response IR dongle kit

JETT-T 104.940.MF/DALI-ST

Accessories



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-T SENSOR
Organic Response sensor for track mounting



ZBK 96
anti-glare flaps



ZBW 83
honeycomb louvre