

## JETT-T 106.930.FL/DALI-ST



## Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- luminaire rotates through 355° and light-head pivots through 180°
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from sheet steel
- clear safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

## Standard options



## Special options




| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| silver  | 669433      | 4043544811080 |
| black   | 669434      | 4043544811097 |
| white   | 669435      | 4043544811103 |

## Lighting data / Norms

|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| Lamps                   | LED Spot / CRI 90 / 3000 K                                |
| Lifetime                | L90 B50 50.000 h<br>L80 B50 100.000 h<br>L80 B20 50.000 h |
| System power            | 52.1 W                                                    |
| Luminaire luminous flux | 6210 lm                                                   |
| System efficiency       | 119.19 lm/W                                               |
| Module efficiency       | 138.00 lm/W                                               |
| UGR class               | ≤22                                                       |
| Beam range              | Flood                                                     |
| Beam angle              | 36°                                                       |
| Supply voltage          | 220 - 240 V / 50 - 60 Hz                                  |
| Protection class        | I                                                         |
| Type of protection      | IP20                                                      |

## Dimensions / Weights


|                        |         |
|------------------------|---------|
| Length                 | 154 mm  |
| Width                  | 103 mm  |
| Height                 | 177 mm  |
| Diameter of light head | 103 mm  |
| Net weight             | 1.31 kg |
| Gross weight           | 1.38 kg |

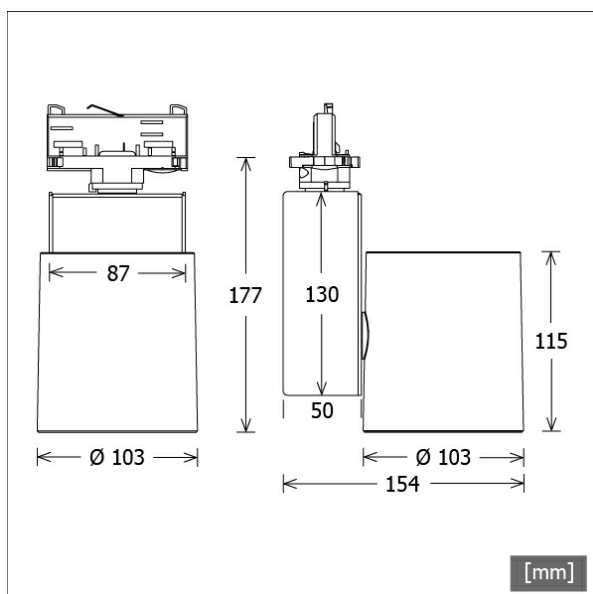

# JETT-T 106.930.FL/DALI-ST

## JETT-T 106.930.FL/DALI-ST

Jett Evo | Track-Mounted (1xLED 52W 930/3000K 6210lm 36°)



|     | C0   | C90  | C180 | C270 |
|-----|------|------|------|------|
| 0°  | 2239 | 2239 | 2239 | 2239 |
| 15° | 1546 | 1546 | 1546 | 1546 |
| 30° | 392  | 392  | 392  | 392  |
| 45° | 11   | 11   | 11   | 11   |
| 60° | 2    | 2    | 2    | 2    |
| 75° | 0    | 0    | 0    | 0    |
| 90° | 0    | 0    | 0    | 0    |

| Offset [m] | Cone width [m] | Illuminance [lx] |
|------------|----------------|------------------|
| 3.0        | 1.97           | 1544.8           |
| 6.0        | 3.95           | 386.2            |
| 9.0        | 5.92           | 171.6            |
| 12.0       | 7.89           | 96.5             |
| 15.0       | 9.86           | 61.8             |

|                    |                    |
|--------------------|--------------------|
| <b>η</b>           | LED                |
| Efficiency         | 120 lm/W           |
| Direct/Indirect    | ↓ 100% / ↑ 0%      |
| System Power       | 52 W               |
| <b>UGR</b>         | X=4H, Y=8H         |
| Reflection factors | 70/50/20           |
| UGR C0/C180        | 20.4               |
| UGR C90/C270       | 20.4               |
| CIE Flux Codes     | 99 100 100 100 100 |
| Ra/CRI             | > 90               |

LTS

## Accessories



**FOCUS 100.1**  
superior optic with focusable biconvex lens for  
accent lighting



**ST-A 10/9000A-1-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 1000 mm)



**ST-A 20/9000A-2-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 2000 mm)



**ST-A 30/9000A-3-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 3000 mm)



**ST-A 40/9000A-4-ST**  
surface-mounted track ONETrack Advance with data  
bus  
(length: 4000 mm)



**ST-A MONO/9000-BPU-D**  
3-phase surface-mounted monopoint with bus  
option



**ST-E 10/9000-1-R**  
recessed track ONETrack with data bus  
(length: 1000 mm)



**ST-E 20/9000-2-R**  
recessed track ONETrack with data bus  
(length: 2000 mm)



**ST-E 30/9000-3-R**  
recessed track ONETrack with data bus  
(length: 3000 mm)



**ST-E 40/9000-4-R**  
recessed track ONETrack with data bus  
(length: 4000 mm)



**ST-E MONO/9000-BPU-D**  
3-phase recessed monopoint with bus option



**ZB-OR DONGLE**  
Organic Response IR dongle kit

# JETT-T 106.930.FL/DALI-ST

## Accessories



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
Organic Response sensor for track mounting



**ZBK 96**  
anti-glare flaps



**ZBW 83**  
honeycomb louvre