


BIXXL 205.35.60.2/DALI-EU



Description

- flexible track-mounted spotlight in separated design with organically formed light-head
- luminaire rotates through 355° and light-head pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options






Colours	Article no.	EAN
black	646473	4043544536983
silver	646474	4043544536990
white	646475	4043544537003

Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3500 K
EPREL light sources	848112
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	51.0 W
Luminaire luminous flux	5350 lm
System efficiency	104.90 lm/W
Module efficiency	144.70 lm/W
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	136 mm
Width	170 mm
Height	195 mm
Diameter of light head	123 mm
Net weight	1.60 kg
Gross weight	1.80 kg

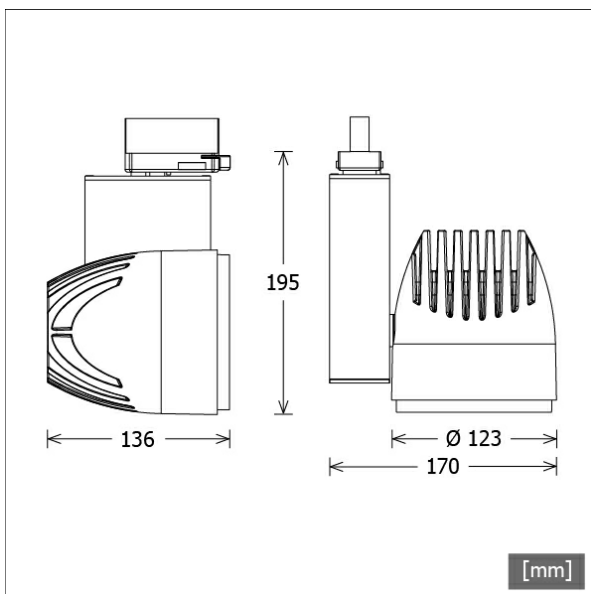

BIXXL 205.35.60.2/DALI-EU


BIXXL 200 Track-Mounted (1xLED 51W 835/3500K 5350lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	1007	1007	1007	1007
15°	987	987	987	987
30°	615	615	615	615
45°	32	32	32	32
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]




η	LED
Efficiency	105 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	51 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.6
UGR C90/C270	22.6
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>80

LTS

Accessories



ZBK 98
anti-glare flaps



ZBW 84
honeycomb louvre