


BIXXL 206.35.40.2/DALI-ST



Description

- flexible track-mounted spotlight in separated design with organically formed light-head
- luminaire rotates through 355° and light-head pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

Standard options






Colours	Article no.	EAN
silver	661734	4043544707826
black	661735	4043544707833
white	661736	4043544707840

Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3500 K
EPREL light sources	848112
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	59.0 W
System power	5800 lm
Luminaire luminous flux	98.30 lm/W
System efficiency	144.70 lm/W
Module efficiency	40°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	I
Protection class	IP20
Type of protection	

Dimensions / Weights

Length	136 mm
Width	170 mm
Height	202 mm
Diameter of light head	123 mm
Net weight	1.86 kg
Gross weight	1.96 kg

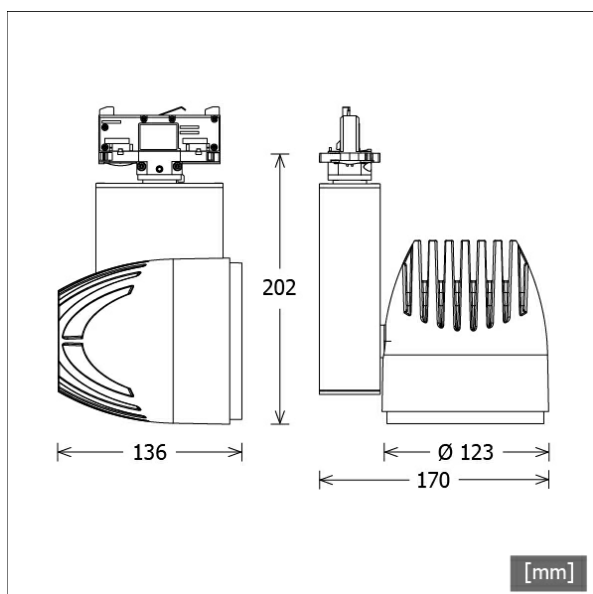

BIXXL 206.35.40.2/DALI-ST

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-A MONO/9000-BPU-D
3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ST-E MONO/9000-BPU-D
3-phase recessed monopoint with bus option



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series

BIXXL 206.35.40.2/DALI-ST

Accessories



ZB-OR-T SENSOR
Organic Response sensor for track mounting



ZBK 98
anti-glare flaps



ZBW 84
honeycomb louvre