


BIXXL 206.35.60.2/DALI-ST



Description

- flexible track-mounted spotlight in separated design with organically formed light-head
- luminaire rotates through 355° and light-head pivots through 90°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with design-integrated passive cooling
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- light-head made from die-cast aluminium
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

Standard options






| Colours | Article no. | EAN |
|---------|-------------|---------------|
| silver | 661737 | 4043544707857 |
| black | 661738 | 4043544707864 |
| white | 661739 | 4043544707871 |

Lighting data / Norms

| | |
|-------------------------|---|
| Lamps | LED Spot / CRI 80 / 3500 K |
| EPREL light sources | 848112 |
| Lifetime | L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h |
| System power | 59.0 W |
| Luminaire luminous flux | 5990 lm |
| System efficiency | 101.52 lm/W |
| Module efficiency | 144.70 lm/W |
| Beam angle | 60° |
| Supply voltage | 220 - 240 V / 50 - 60 Hz |
| Protection class | I |
| Type of protection | IP20 |

Dimensions / Weights

| | |
|------------------------|---------|
| Length | 136 mm |
| Width | 170 mm |
| Height | 202 mm |
| Diameter of light head | 123 mm |
| Net weight | 1.86 kg |
| Gross weight | 1.96 kg |

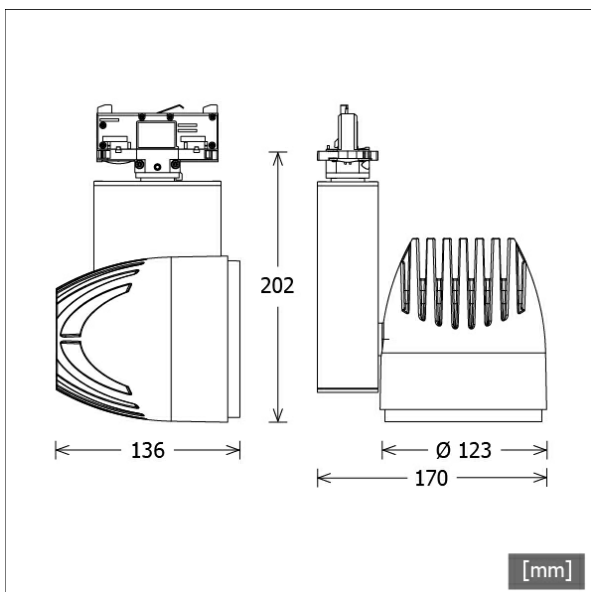

BIXXL 206.35.60.2/DALI-ST

Accessories



ST-A 10/9000A-1-ST
surface-mounted track ONETrack Advance with data bus
(length: 1000 mm)



ST-A 20/9000A-2-ST
surface-mounted track ONETrack Advance with data bus
(length: 2000 mm)



ST-A 30/9000A-3-ST
surface-mounted track ONETrack Advance with data bus
(length: 3000 mm)



ST-A 40/9000A-4-ST
surface-mounted track ONETrack Advance with data bus
(length: 4000 mm)



ST-A MONO/9000-BPU-D
3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
recessed track ONETrack with data bus
(length: 1000 mm)



ST-E 20/9000-2-R
recessed track ONETrack with data bus
(length: 2000 mm)



ST-E 30/9000-3-R
recessed track ONETrack with data bus
(length: 3000 mm)



ST-E 40/9000-4-R
recessed track ONETrack with data bus
(length: 4000 mm)



ST-E MONO/9000-BPU-D
3-phase recessed monopoint with bus option



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series

BIXXL 206.35.60.2/DALI-ST


Accessories



ZB-OR-T SENSOR
Organic Response sensor for track mounting



ZBK 98
anti-glare flaps



ZBW 84
honeycomb louvre