


LK-P 045.1 OAG/...

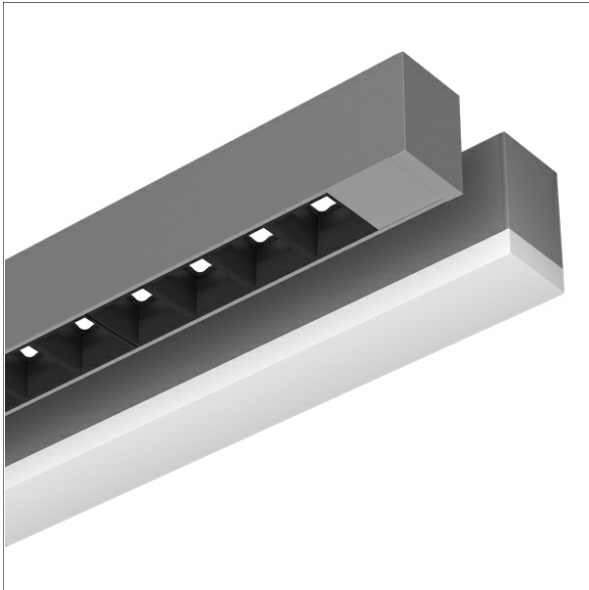

Description

- light trunking system (made-to-measure) for surface, wall or suspended mounting
- suitable for opal diffuser protruding and Choc light-inserts (LK-CH...)
- high-quality extruded aluminium profile
- possible mitre cuts for surfaces, wall/ceiling inside, edge outside/inside (cutting cost on request)
- light-inserts and (necessary) accessories to be ordered separately
- without acrylic glass diffuser

Notes

For luminaires with only "1 light-insert" add "+5 mm" for end covers or use the appropriate Monoline single luminaire. The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Lighting data / Norms

Type of protection IP20


Dimensions / Weights

Width	45 mm
Height	60 mm
Net weight	0.98 kg
Gross weight	1.08 kg

Special dimensions

length = profile length + (2 x 3 mm thickness of end covers)

Colours	Article no.	EAN
silver anodised	669048	4043544807274
black	669049	4043544807281
white	669050	4043544807298

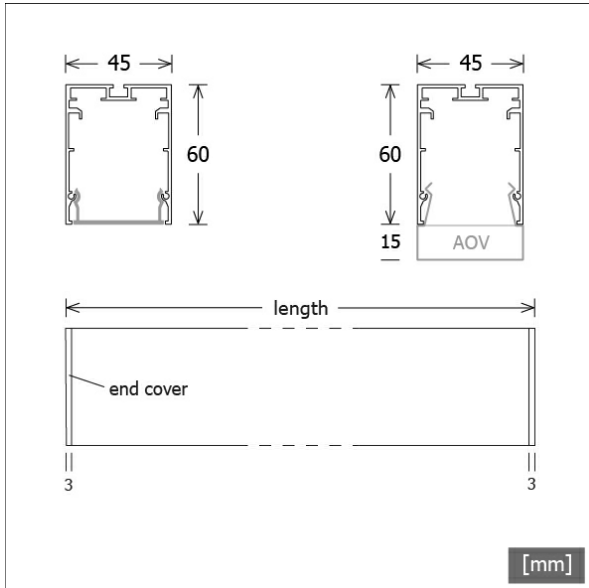

LK-P 045.1 OAG/...

Accessories



LK-Z045 AOV-001/...
opal acrylic glass protruding
(length made-to-measure)



LK-Z045 AOV-E-001/1500
end cover opal acrylic glass protruding
(length: 1500 mm)



LK-Z045 AOV-K-001
concealing unit for opal acrylic glass protruding




LK-Z045 BA/...
blind cover
(length made-to-measure)



LK-Z045 SENSOR/OR
Organic Response sensor (DALI PS3) for Lichtkanal 045



LK-Z045.1
end covers
(2 pieces)



LK-Z045.102.00
connector kit linear



LK-Z045.102.90
connector kit for corners



LK-Z045.103.03
wire-rope kit with feed-in
(length: 3000 mm, 3-core)



LK-Z045.103.03/DIM
wire-rope kit with feed-in DALI
(5-core, length: 3000 mm)



LK-Z045.103.05
wire-rope kit with feed-in
(length: 5000 mm, 3-core)



LK-Z045.103.05/DIM
wire-rope kit with feed-in DALI
(5-core, length: 5000 mm)

LK-P 045.1 OAG/...

Accessories



LK-Z045.104.03
wire-rope kit without feed-in
(length: 3000 mm)



LK-Z045.104.05
wire-rope kit without feed-in
(length: 5000 mm)



LK-Z045.110
earthing kit for sectional form parts



LK-Z045.111
earthing set



LK-Z045.114
wall bracket
(1 piece)



LK-Z070.118.03
feed-in kit
(3-core, length: 3000 mm)



LK-Z070.118.03/DIM
feed-in kit DALI
(5-core, length: 3000 mm)



LK-Z070.118.05
feed-in kit
(3-core, length: 5000 mm)



LK-Z070.118.05/DIM
feed-in kit DALI
(5-core, length: 5000 mm)

LK-P 045.1 OAG/...

Light inserts



Name	Description
LK-L 045.10830.0705.1/DALI	3000 K, 705 mm, 10.2 W, 1440 lm
LK-L 045.10840.0705.1/DALI	4000 K, 705 mm, 10.2 W, 1530 lm
LK-L 045.10830.0845.1/DALI	3000 K, 845 mm, 12.3 W, 1680 lm
LK-L 045.10840.0845.1/DALI	4000 K, 845 mm, 12.3 W, 1780 lm
LK-L 045.10830.0985.1/DALI	3000 K, 985 mm, 14.3 W, 2020 lm
LK-L 045.10840.0985.1/DALI	4000 K, 985 mm, 14.3 W, 2140 lm
LK-L 045.10830.1125.1/DALI	3000 K, 1125 mm, 16.4 W, 2180 lm
LK-L 045.10840.1125.1/DALI	4000 K, 1125 mm, 16.4 W, 2310 lm
LK-L 045.10830.1405.1/DALI	3000 K, 1405 mm, 20.5 W, 2720 lm
LK-L 045.10840.1405.1/DALI	4000 K, 1405 mm, 20.5 W, 2880 lm
LK-L 045.10830.1685.1/DALI	3000 K, 1685 mm, 24.5 W, 3260 lm
LK-L 045.10840.1685.1/DALI	4000 K, 1685 mm, 24.5 W, 3460 lm

Name	Description
LK-L 045.11830.0705.1/DALI	3000 K, 705 mm, 15.8 W, 2220 lm
LK-L 045.11840.0705.1/DALI	4000 K, 705 mm, 15.8 W, 2340 lm
LK-L 045.11830.0845.1/DALI	3000 K, 845 mm, 18.9 W, 2540 lm
LK-L 045.11840.0845.1/DALI	4000 K, 845 mm, 18.9 W, 2690 lm
LK-L 045.11830.0985.1/DALI	3000 K, 985 mm, 22.1 W, 3100 lm
LK-L 045.11840.0985.1/DALI	4000 K, 985 mm, 22.1 W, 3280 lm
LK-L 045.11830.1125.1/DALI	3000 K, 1125 mm, 25.2 W, 3340 lm
LK-L 045.11840.1125.1/DALI	4000 K, 1125 mm, 25.2 W, 3540 lm
LK-L 045.11830.1405.1/DALI	3000 K, 1405 mm, 31.5 W, 4180 lm
LK-L 045.11840.1405.1/DALI	4000 K, 1405 mm, 31.5 W, 4430 lm
LK-L 045.11830.1685.1/DALI	3000 K, 1685 mm, 37.8 W, 5020 lm
LK-L 045.11840.1685.1/DALI	4000 K, 1685 mm, 37.8 W, 5320 lm