


## LK-P 045.2 OAG/...



| Colours         | Article no. | EAN           |
|-----------------|-------------|---------------|
| silver anodised | 669147      | 4043544808264 |
| black           | 669148      | 4043544808271 |
| white           | 669149      | 4043544808288 |

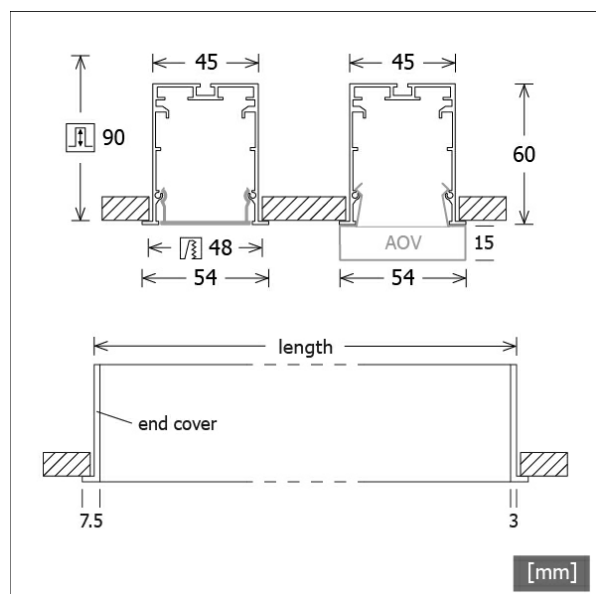

### Description

- light trunking system (made-to-measure) for recessed mounting into plasterboard
- suitable for opal diffuser protruding and Choc light-inserts (LK-CH...)
- high-quality extruded aluminium profile with filigree trim (4.5 mm)
- possible mitre cuts for surfaces, wall/ceiling inside, edge outside/inside (cutting cost on request)
- light-inserts and (necessary) accessories to be ordered separately
- without acrylic glass diffuser
- quick-mounting via clamps

### Notes

For luminaires with only "1 light-insert" add "+5 mm" for end covers or use the appropriate Monoline single luminaire. The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at  $dT = 10$  Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

### Lighting data / Norms

Type of protection IP20

### Dimensions / Weights

|                   |                |
|-------------------|----------------|
| Width             | 54 mm          |
| Height            | 60 mm          |
| Ceiling thickness | 11.0 - 35.0 mm |
| Recessed depth    | 90 mm          |
| Net weight        | 1.03 kg        |
| Gross weight      | 1.13 kg        |

### Special dimensions

required clamps space: max. 130 mm; ceiling cut-out = (profile length + (2 x 3 mm thickness of end covers) + 2 mm) x 48 mm; total length = profile length + (2 x 7.5 mm end covers)

## LK-P 045.2 OAG/...

### Accessories



**LK-Z045 AOV-002/...**  
opal acrylic glass protruding  
(length made-to-measure)



**LK-Z045 AOV-E-002/1500**  
end cover opal acrylic glass protruding  
(length: 1500 mm)



**LK-Z045 AOV-K-002**  
concealing unit for opal acrylic glass protruding



**LK-Z045 BA/...**  
blind cover  
(length made-to-measure)



**LK-Z045 SENSOR/OR**  
Organic Response sensor (DALI PS3) for Lichtkanal  
045



**LK-Z045.102.00**  
connector kit linear



**LK-Z045.102.90**  
connector kit for corners



**LK-Z045.110**  
earthing kit for sectional form parts



**LK-Z045.111**  
earthing set



**LK-Z045.2**  
end covers  
(2 pieces)

# LK-P 045.2 OAG/...

Light inserts



| Name                       | Description                       |
|----------------------------|-----------------------------------|
| LK-L 045.10830.0705.1/DALI | 3000 K, 705 mm, 10.2 W , 1440 lm  |
| LK-L 045.10840.0705.1/DALI | 4000 K, 705 mm, 10.2 W , 1530 lm  |
| LK-L 045.10830.0845.1/DALI | 3000 K, 845 mm, 12.3 W , 1680 lm  |
| LK-L 045.10840.0845.1/DALI | 4000 K, 845 mm, 12.3 W , 1780 lm  |
| LK-L 045.10830.0985.1/DALI | 3000 K, 985 mm, 14.3 W , 2020 lm  |
| LK-L 045.10840.0985.1/DALI | 4000 K, 985 mm, 14.3 W , 2140 lm  |
| LK-L 045.10830.1125.1/DALI | 3000 K, 1125 mm, 16.4 W , 2180 lm |
| LK-L 045.10840.1125.1/DALI | 4000 K, 1125 mm, 16.4 W , 2310 lm |
| LK-L 045.10830.1405.1/DALI | 3000 K, 1405 mm, 20.5 W , 2720 lm |
| LK-L 045.10840.1405.1/DALI | 4000 K, 1405 mm, 20.5 W , 2880 lm |
| LK-L 045.10830.1685.1/DALI | 3000 K, 1685 mm, 24.5 W , 3260 lm |
| LK-L 045.10840.1685.1/DALI | 4000 K, 1685 mm, 24.5 W , 3460 lm |

| Name                       | Description                       |
|----------------------------|-----------------------------------|
| LK-L 045.11830.0705.1/DALI | 3000 K, 705 mm, 15.8 W , 2220 lm  |
| LK-L 045.11840.0705.1/DALI | 4000 K, 705 mm, 15.8 W , 2340 lm  |
| LK-L 045.11830.0845.1/DALI | 3000 K, 845 mm, 18.9 W , 2540 lm  |
| LK-L 045.11840.0845.1/DALI | 4000 K, 845 mm, 18.9 W , 2690 lm  |
| LK-L 045.11830.0985.1/DALI | 3000 K, 985 mm, 22.1 W , 3100 lm  |
| LK-L 045.11840.0985.1/DALI | 4000 K, 985 mm, 22.1 W , 3280 lm  |
| LK-L 045.11830.1125.1/DALI | 3000 K, 1125 mm, 25.2 W , 3340 lm |
| LK-L 045.11840.1125.1/DALI | 4000 K, 1125 mm, 25.2 W , 3540 lm |
| LK-L 045.11830.1405.1/DALI | 3000 K, 1405 mm, 31.5 W , 4180 lm |
| LK-L 045.11840.1405.1/DALI | 4000 K, 1405 mm, 31.5 W , 4430 lm |
| LK-L 045.11830.1685.1/DALI | 3000 K, 1685 mm, 37.8 W , 5020 lm |
| LK-L 045.11840.1685.1/DALI | 4000 K, 1685 mm, 37.8 W , 5320 lm |