



CSARL 72.3027.25



Colours	Article no.	EAN
black	633306	4043544579102
silver	633307	4043544579119
white	633308	4043544579126

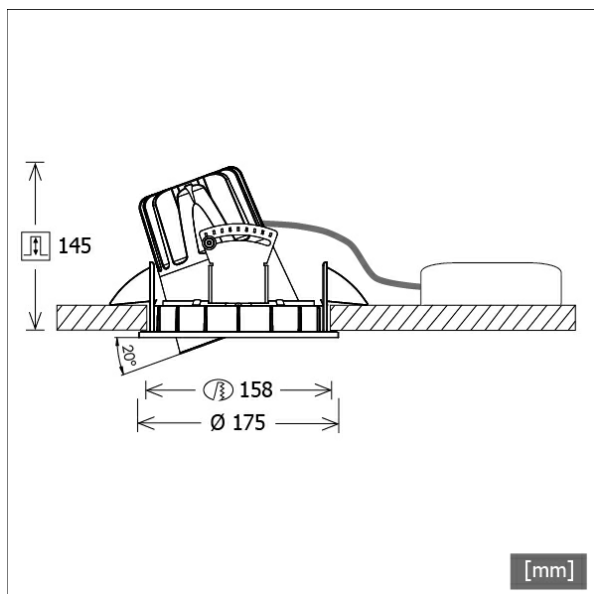

Description

- recessed spotlight with wide range of applications
- light-head rotates through 355° and pivots on gimbals through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from die-cast aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring and light-head made from die-cast zinc
- clear and reflection-free EnergyVision safety glass
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 2700 K
EPREL light sources	847889
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	29.0 W
Luminaire luminous flux	3070 lm
System efficiency	105.86 lm/W
Module efficiency	133.10 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	26°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	175 mm
Height	150 mm
Cut-out (Ø)	158 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	145 mm
Diameter of light head	114 mm
Net weight	2.36 kg

Recessed Spotlights · CSA 72 Round

CSARL 72.3027.25

Gross weight




LTS
LOVE TO SHINE

2.48 kg

CSARL 72.3027.25

CSA 72 Round (1xLED 29W 827/2700K 3070lm 25 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	3142	3142	3142	3142
15°	1267	1267	1267	1267
30°	397	397	397	397
45°	5	5	5	5
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.40	1071.6
6.0	2.79	267.9
9.0	4.19	119.1
12.0	5.59	67.0
15.0	6.98	42.9

η	LED
Efficiency	106 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	29 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.8
UGR C90/C270	18.8
CIE Flux Codes	98 99 100 100 100
Ra/CRI	> 80

LTS

Accessories



ZDAR 158.200-265
compensation ring for ceiling cut-outs from 200 to 265 mm