

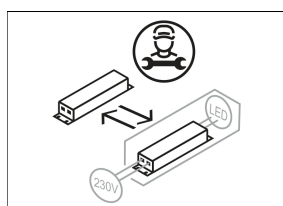


# CSA-R 503.940.MF/DALI

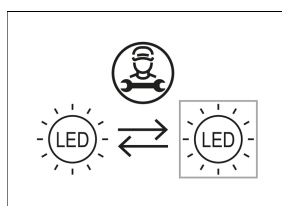


Colours	Article no.	EAN
silver	668241	4043544798992
black	668242	4043544799005
white	668243	4043544799012

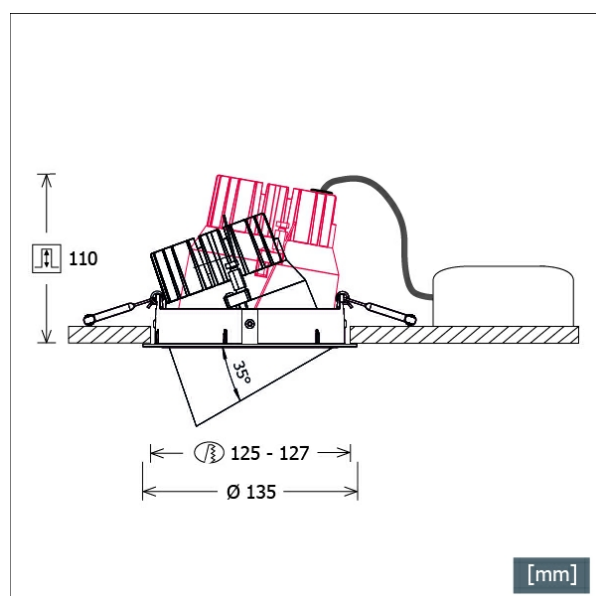

## Description

- recessed spotlight with conical light-head made from die-cast aluminium
- suitable for lighting of vertical surfaces
- luminaire rotates through 355° and light-head pivots out through 35°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling (heat sink made from die-cast aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- front ring made from die-cast aluminium
- light-head with filigree black polycarbonate inner ring for additional glare control
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.1 W
Luminaire luminous flux	3500 lm
System efficiency	129.15 lm/W
Module efficiency	140.00 lm/W
UGR class	≤ 22
Beam range	Medium Flood
Beam angle	23°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


## Dimensions / Weights

Outer diameter	135 mm
Height	109 mm
Cut-out (Ø)	125 mm
Ceiling thickness	3.0 - 26.0 mm
Recessed depth	110 mm
Net weight	0.72 kg
Gross weight	0.78 kg

# CSA-R 503.940.MF/DALI

## CSA-R 503.940.MF/DALI

CSA 50 Generation 2 (1xLED 27W 940/4000K 3500lm 23°)



	C0	C90	C180	C270
0°	4033	4033	4033	4033
15°	1167	1167	1167	1167
30°	371	371	371	371
45°	13	13	13	13
60°	5	5	5	5
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.18	1568.3
6.0	2.35	392.1
9.0	3.53	174.3
12.0	4.71	98.0
15.0	5.89	62.7

<b>η</b>	LED
Efficiency	130 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.6
UGR C90/C270	19.6
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>90

LTS

## Accessories



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-R SENSOR**  
Organic Response sensor for recessed mounting



**ZDAR 125.145-205**  
compensation ring for ceiling cut-outs from 145 to 205 mm