

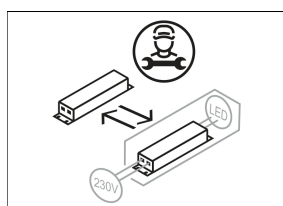


# CSA-R 503.940.OV46/DALI

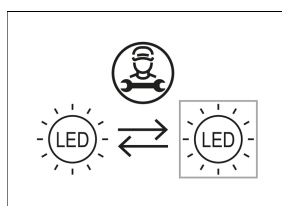

Colours	Article no.	EAN
silver	670167	4043544818355
black	670168	4043544818362
white	670169	4043544818379

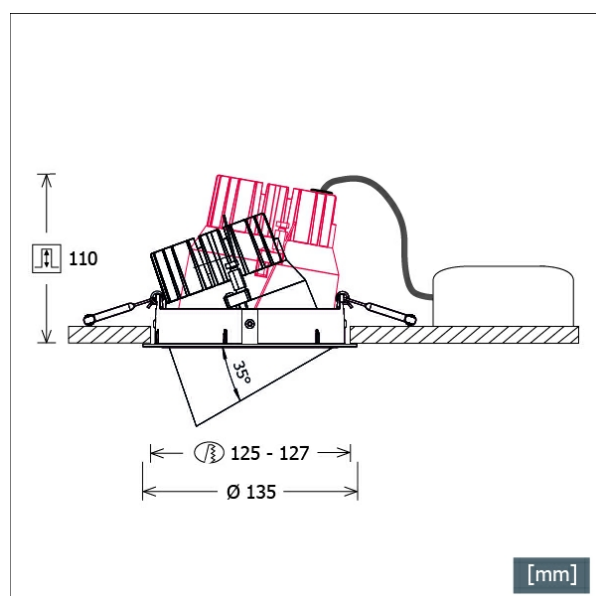

## Description

- recessed spotlight with conical light-head made from die-cast aluminium
- suitable for lighting of vertical surfaces
- luminaire rotates through 355° and light-head pivots out through 35°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling (heat sink made from die-cast aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- front ring made from die-cast aluminium
- light-head with filigree black polycarbonate inner ring for additional glare control
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	27.1 W
Luminaire luminous flux	3470 lm
System efficiency	128.04 lm/W
Module efficiency	140.00 lm/W
UGR class	≤25
Beam range	Oval
Beam angle	Oval 40/60
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


## Dimensions / Weights

Outer diameter	135 mm
Height	109 mm
Cut-out (Ø)	125 mm
Ceiling thickness	3.0 - 26.0 mm
Recessed depth	110 mm
Net weight	0.72 kg
Gross weight	0.78 kg

# CSA-R 503.940.OV46/DALI

## CSA-R 503.940.OV46/DALI

CSA 50 Generation 2 (1xLED 27W 940/4000K 3470lm)



	C0	C90	C180	C270
0°	1873	1873	1873	1873
15°	1693	858	1693	858
30°	1006	372	1006	372
45°	20	10	20	10
60°	2	1	2	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	3.55	1.48	722.2
6.0	7.09	2.95	180.6
9.0	10.64	4.43	80.2
12.0	14.19	5.90	45.1
15.0	17.73	7.38	28.9

<b>η</b>	LED
Efficiency	129 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.8
UGR C90/C270	19.3
CIE Flux Codes	99 100 100 100 100
Ra/CRI	>90

LTS

## Accessories



**ZB-OR DONGLE**  
Organic Response IR dongle kit



**ZB-OR GATEWAY**  
Organic Response IoT Gateway Cascade Series



**ZB-OR-R SENSOR**  
Organic Response sensor for recessed mounting



**ZDAR 125.145-205**  
compensation ring for ceiling cut-outs from 145 to 205 mm