


ML-E 060.10840.2 AOV/DALI



Colours	Article no.	EAN
silver anodised	670500	4043544821683
black	670501	4043544821690
white	670502	4043544821706

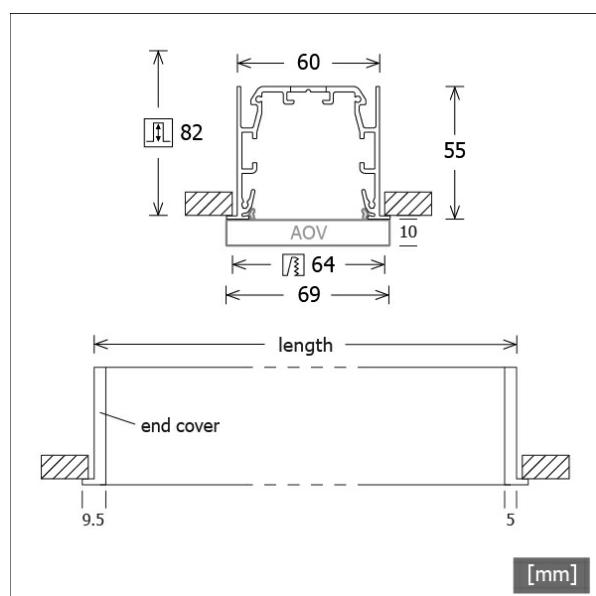

Description

- filigree linear luminaire for recessed mounting
- symmetrical light distribution and uniform area illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- aluminium housing with filigree trim (4.5 mm)
- end covers made from polycarbonate
- opal acrylic glass diffuser protruding (10 mm) made from PMMA with tool-free snap-in technology
- easy quick-mounting in plasterboard with clamps
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $dT = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	16.5 W
Luminaire luminous flux	2610 lm
System efficiency	158.18 lm/W
Module efficiency	205.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40

Dimensions / Weights

Length	1149 mm
Width	69 mm
Height	65 mm
Cut-out (LxW)	1142 x 64 mm
Ceiling thickness	5.0 - 25.0 mm
Recessed depth	82 mm
Net weight	3.17 kg
Gross weight	3.59 kg


Special dimensions

required clamps space: max. 141 mm

ML-E 060.10840.2 AOV/DALI

ML-E 060.10840.2 AOV/DALI

Monoline 060 | Recessed (1xLED 17W 840/4000K 2610lm)



	C0	C90	C180	C270
0°	351	351	351	351
15°	332	328	332	328
30°	280	271	280	271
45°	213	200	213	200
60°	143	125	143	125
75°	74	51	74	51
90°	26	1	26	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	7.97	7.16	101.7
6.0	15.93	14.33	25.4
9.0	23.90	21.49	11.3
12.0	31.86	28.66	6.4
15.0	39.83	35.82	4.1

η	LED
Efficiency	154 lm/W
Direct/Indirect	↓ 93% / ↑ 7%
System Power	17 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.5
UGR C90/C270	22.6
CIE Flux Codes	48 78 94 93 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting