

ML-R 060.11830.3 19W/DALI



Description

- filigree linear luminaire for recessed mounting and 360° glare-free workplace lighting (UGR < 19)
- outstanding ease of maintenance
- no UV and thermal emissions
- aluminium housing with filigree trim (4.5 mm)
- end covers made from polycarbonate
- nanoOptix light-control foil "wide beam" made from clear polycarbonate with double asymmetric light distribution
- easy quick-mounting in plasterboard with clamps
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	23.5 W
Luminaire luminous flux	3210 lm
System efficiency	136.59 lm/W
Module efficiency	193.00 lm/W
UGR class	≤ 19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20




Dimensions / Weights

Length	1429 mm
Width	69 mm
Height	55 mm
Cut-out (LxW)	1422 x 64 mm
Ceiling thickness	5.0 - 25.0 mm
Recessed depth	82 mm
Net weight	3.37 kg
Gross weight	3.89 kg

Special dimensions

required clamps space: max. 141 mm

Colours	Article no.	EAN
silver anodised	670533	4043544822017
black	670534	4043544822024
white	670535	4043544822031

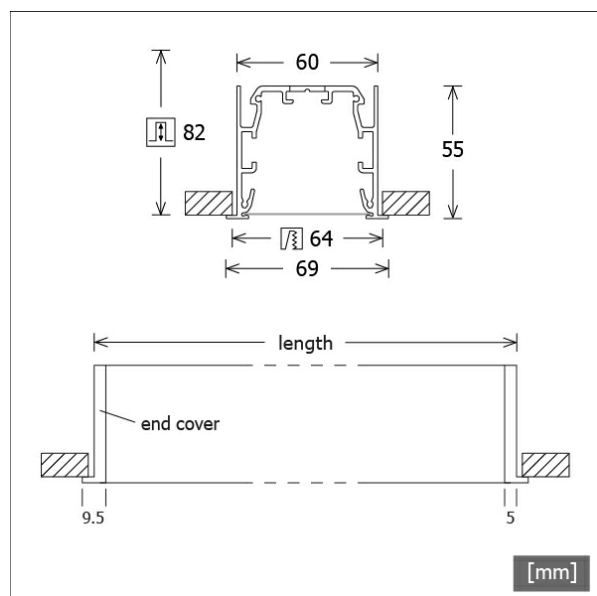

ML-R 060.11830.3 19W/DALI

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting