

CSARL 72.3040.25/DALI



Colours	Article no.	EAN
black	634863	4043544579676
silver	634864	4043544579683
white	634865	4043544579690



Description

- recessed spotlight with wide range of applications
- light-head rotates through 355° and pivots on gimbals through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from die-cast aluminium)
- high performance specular aluminium reflector with precise symmetrical beam characteristic for highest luminous efficiency and best glare-free lighting
- front/recessed ring and light-head made from die-cast zinc
- clear and reflection-free EnergyVision safety glass
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	857618
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	29.0 W
Luminaire luminous flux	3300 lm
System efficiency	113.79 lm/W
Module efficiency	170.60 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	26°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Outer diameter	175 mm
Height	150 mm
Cut-out (Ø)	158 mm
Ceiling thickness	1.0 - 25.0 mm
Recessed depth	145 mm
Diameter of light head	114 mm
Net weight	2.38 kg

Recessed Spotlights · CSA 72 Round

CSARL 72.3040.25/DALI

Gross weight




LTS
LOVE TO SHINE

2.50 kg

CSARL 72.3040.25/DALI

CSA 72 Round (1xLED 29W 840/4000K 3300lm 25 °)

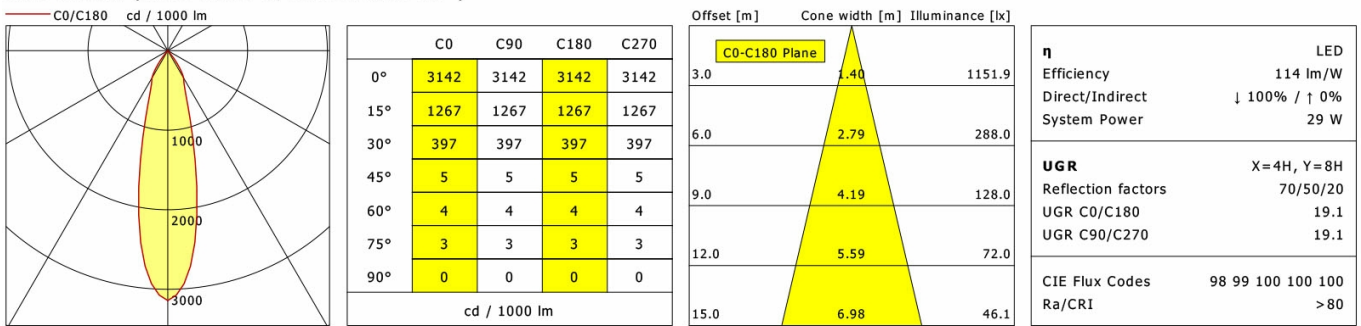

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting