

ML-E 070.11830.2 AOV/DALI



Description

- linear luminaire for recessed mounting into plasterboard
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- aluminium housing with filigree trim (5 mm)
- end covers made from die-cast zinc
- opal protruding acrylic glass diffuser (19 mm) with profile guide and tool-free snap-in technology
- quick-mounting via clamps
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $dT = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.5 W
Luminaire luminous flux	3650 lm
System efficiency	143.13 lm/W
Module efficiency	193.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40




Dimensions / Weights

Length	1146 mm
Width	80 mm
Height	99 mm
Cut-out (LxW)	1138 x 74 mm
Ceiling thickness	6.0 - 25.0 mm
Recessed depth	100 mm
Net weight	4.46 kg
Gross weight	4.89 kg

Special dimensions

required clamps space: max. 220 mm


Colours	Article no.	EAN
silver anodised	670305	4043544819734
black	670306	4043544819741
white	670307	4043544819758

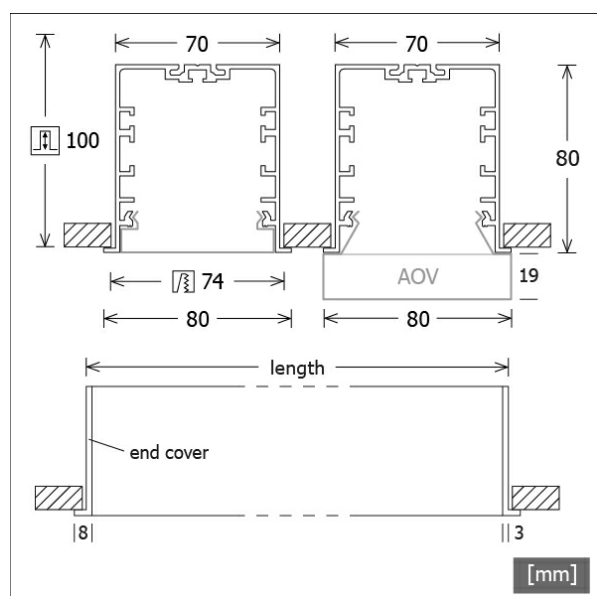

ML-E 070.11830.2 AOV/DALI

ML-E 070.11830.2 AOV/DALI

Monoline 070 | Recessed (1xLED 26W 830/3000K 3650lm)



	C0	C90	C180	C270
0°	312	312	312	312
30°	258	240	258	240
60°	146	106	146	106
90°	44	1	44	1
120°	30	0	30	0
150°	16	1	16	1
180°	1	1	1	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	9.32	6.81	126.7
6.0	18.63	13.62	31.7
9.0	27.95	20.44	14.1
12.0	37.26	27.25	7.9
15.0	46.58	34.06	5.1

η	LED
Efficiency	140 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.2
UGR C90/C270	22.5
CIE Flux Codes	45 75 92 89 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting