



ML-P 045.10830.3 AOV/DALI

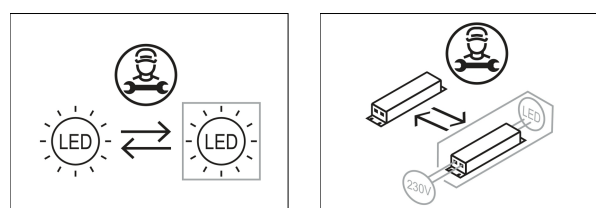

Colours	Article no.	EAN
silver anodised	669998	4043544816672
black	669999	4043544816689
white	670000	4043544816696

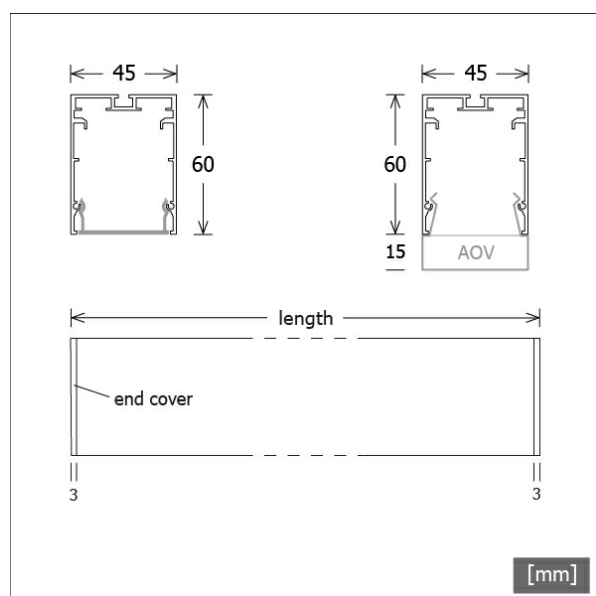

Description

- linear luminaire for pendant mounting
- symmetrical light distribution and illumination
- outstanding ease of maintenance
- no UV and thermal emissions
- housing made from aluminium
- end covers made from polycarbonate
- opal protruding acrylic glass diffuser (15 mm) with profile guide and tool-free snap-in technology
- wire-rope suspension 2-fold with height-adjustment (length: 3000 mm)
- ballast (LED converter DALI, dimmable) integrated

Notes

The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin. IP40 only applies in combination with mounted acrylic glass diffuser mounted acrylic glass profile.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	20.5 W
Luminaire luminous flux	2720 lm
System efficiency	132.68 lm/W
Module efficiency	193.00 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP40


Dimensions / Weights

Length	1416 mm
Width	45 mm
Height	75 mm
Net weight	2.89 kg
Gross weight	3.31 kg

ML-P 045.10830.3 AOV/DALI

ML-P 045.10830.3 AOV/DALI

Monoline 045 | Pendant (1xLED 21W 830/3000K 2720lm)



	C0	C90	C180	C270
0°	330	330	330	330
30°	259	251	259	251
60°	140	106	140	106
90°	45	1	45	1
120°	33	0	33	0
150°	16	1	16	1
180°	1	1	1	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	8.04	6.56	99.8
6.0	16.09	13.11	24.9
9.0	24.13	19.67	11.1
12.0	32.18	26.23	6.2
15.0	40.22	32.78	4.0

η	LED
Efficiency	130 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.6
UGR C90/C270	22.1
CIE Flux Codes	47 76 92 89 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting